

NONPROVISIONAL PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

OLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400
Facsimile: (703) 836-2787

Attorney Docket No.: 107497

Date: September 29, 2000

BOX PATENT APPLICATION

**NONPROVISIONAL APPLICATION TRANSMITTAL
RULE §1.53(b)**

Director of the U.S. Patent and Trademark Office
Washington, D.C. 20231



Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the nonprovisional patent application

For (Title): DATA PROCESSING FOR ARRANGING TEXT AND IMAGE DATA ON A SUBSTRATE

By (Inventors): Chitoshi ITO, Kazuhiko IWANAGA, Hirokazu KUWABARA and Tatsuiro IKEDO

- ☒ Formal drawings (Figs. 1-27d; 25 sheets) are attached.
- ☒ A Declaration and Power of Attorney is filed herewith.
- ☒ An assignment of the invention to BROTHER KOGYO KABUSHIKI KAISHA is filed herewith.
- ☐ An Information Disclosure Statement is filed herewith.
- ☐ A statement to establish small entity status under 37 C.F.R. §§1.9 and 1.27 is filed herewith.
- ☐ A Preliminary Amendment is filed herewith.
- ☐ Please amend the specification by inserting before the first line the sentence --This nonprovisional application claims the benefit of U.S. Provisional Application No. _____, filed _____,--
- ☒ Priority of foreign applications:
 - No. 11-279317 filed September 30, 1999 in Japan is claimed (35 U.S.C. §119).
 - No. 11-279318 filed September 30, 1999 in Japan is claimed (35 U.S.C. §119).
 - No. 11-279471 filed September 30, 1999 in Japan is claimed (35 U.S.C. §119).
 - No. 11-279472 filed September 30, 1999 in Japan is claimed (35 U.S.C. §119).
- ☐ A certified copy of the above corresponding foreign application(s) is filed herewith.
- ☒ The filing fee is calculated below:

**CLAIMS IN THE APPLICATION AFTER ENTRY OF
ANY PRELIMINARY AMENDMENT NOTED ABOVE**

FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	40 - 20	= 20*
INDEP CLAIMS	4 - 3	= *
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

* If the difference is less than zero, enter "0".

SMALL ENTITY

RATE	FEE
	\$ 345
x 9 =	\$
x 39 =	\$
+130 =	\$
TOTAL	\$

**OTHER THAN A
SMALL ENTITY**

RATE	FEE
	\$ 690
x 18 =	\$ 360
x 78 =	\$ 78
+260 =	\$
TOTAL	\$1128

- ☒ Check No. 112382 in the amount of \$1128.00 to cover the filing fee is attached. Except as otherwise noted herein, the Director is hereby authorized to charge any other fees that may be required to complete this filing, or to credit any overpayment, to Deposit Account No. 15-0461. Two duplicate copies of this sheet are attached.
- ☐ This application is entitled to small entity status. DO NOT charge large entity fees to our Deposit Account.

Respectfully submitted,

James A. Oliff

James A. Oliff
Registration No. 27,075

Thomas J. Pardini
Registration No. 30,411

JAO:TJP/mgs

Inventor Information


Inventor One Given Name:: Chitoshi
Family Name:: ITO
Name Suffix::
City of Residence:: Kasugai-shi
State or Prov. of Residence:: Aichi-ken
Country of Residence:: Japan
Inventor Two Given Name:: Kazuhiko
Family Name:: IWANAGA
Name Suffix::
City of Residence:: Nagoya-shi
State or Prov. of Residence:: Aichi-ken
Country of Residence:: Japan
Inventor Three Given Name:: Hirokazu
Family Name:: KUWABARA
Name Suffix::
City of Residence:: Nagoya-shi
State or Prov. of Residence:: Aichi-ken
Country of Residence:: Japan
Inventor Four Given Name:: Tatsuhiro
Family Name:: IKEDO
Name Suffix::
City of Residence:: Nagoya-shi
State or Prov. of Residence:: Aichi-ken
Country of Residence:: Japan
Inventor Five Given Name ::
Family Name::
Name Suffix::
City of Residence::
State or Prov. of Residence::
Country of Residence::

Correspondence Information

Name Line One:: Oliff & Berridge PLC
Address Line One:: P.O. Box 19928
City:: Alexandria
State or Province:: VA
Postal or Zip Code:: 22320
Telephone:: (703) 836-6400
Fax:: (703) 836-2787
Electronic Mail:: commcenter@oliff.com

Application Information

Title Line One:: DATA PROCESSING FOR ARRANGING TEXT
Title Line Two:: AND IMAGE DATA ON A SUBSTRATE
Title Line Three::
Title Line Four::



006269" E3027960

Total Drawing Sheets:: 25
Docket Number:: 107497

Continuity Information

>This application is a::

Application One::

Filing Date::

Patent Number::

which is a::


>>Application Two::

Filing Date::

Patent Number::

Prior Foreign Applications

Foreign Application One:: 11-279317
Filing Date:: September 30, 1999
Country:: Japan
Priority Claimed:: yes
Foreign Application Two:: 11-279318
Filing Date:: September 30, 1999
Country:: Japan
Priority Claimed:: yes
Foreign Application Three:: 11-279471
Filing Date:: September 30, 1999
Country:: Japan
Priority Claimed:: yes
Foreign Application Four:: 11-279472
Filing Date:: September 30, 1999
Country:: Japan
Priority Claimed:: yes



0057203-092900

**DATA PROCESSING FOR ARRANGING
TEXT AND IMAGE DATA ON A SUBSTRATE**

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

 The present invention relates to a data processing method, device and program for effectively arranging text and image data in a well-organized manner.

 2. Description of the Prior Art

10 With the recent progress in computer technology and the growth of the Internet, computer users can now quickly access a wide range of information via the World Wide Web (WWW) and easily display desired character arrays and images on reference software called Web browsers (hereinafter
15 referred to as browsers). However, since there are occasions when the user may wish to access such information from places in which a computer is not available, the user must print out the accessed data on paper in order to reference the data at those locations. Most browsers
20 support a printing function for this purpose. Using this function, the easiest method is to print out the character arrays and images exactly as they appear on the browser onto A4-size paper or the like.

 In many cases, however, the user requires only a
25 portion of the data displayed in the browser. By using the print function in the browser to print out the data, all

006260" EEO2/950

displayed data including unnecessary data is printed. As a result, there are an increased number of printed sheets, which is a waste of paper. These sheets can be heavy and difficult to carry; and they take up much storage room.

5 Further, searching through all the unnecessary data for desired data can be time-consuming.

10 In order to avoid these problems, the user must be able to extract only the desired data displayed in the browser and insert this data into a word processing program using the copy and paste functions or the like. Using various functions of the word processing program, the user must be able to edit the extracted data into a desired layout.

15 Unfortunately, the process of extracting necessary data from a browser and inserting the data into word processing software is an extremely complex one with conventional programs. When the user wishes to print both text and image data extracted from a browser onto a sheet of paper of a desired size, for example, the area on this sheet

20 of paper must be divided into text areas for arranging text data and image areas for arranging image data. Further, operations must be performed to arrange each portion of text data and image data in a desired manner into these areas. Such operations require time and effort.

25

SUMMARY OF THE INVENTION

In view of the foregoing, it is an object of the present invention to provide a data processing method, device and program for processing text and image data such that the data can be printed on a sheet of paper having a
5 desired size in a well-organized manner without the need for performing complex processes.

To achieve the above and other objects, the present invention provides, according to one aspect of the invention, a data processing program serving as a basic program
10 includes an identification program for identifying whether a piece of data in a block of data containing one or plural pieces of data is text data or image data; a repeat program for repeatedly executing the identification program with respect to each piece of data contained in the block of
15 data; a determination program for determining whether the one or plural pieces of data as identified through the execution of the repeat program include only the text data, only the image data, or both the text data and the image data, and providing a determination result; and a layout
20 program for executing layout of the one or plural pieces of data according to a layout pattern that differs depending upon the determination result.

A print program, a first cut program, and a second cut program can further be included in the basic program. The
25 print program is provided for instructing to print the one

or plural pieces of data on an elongated, web-like substrate having a width according to the layout pattern used in the layout program. The first cut program is provided for instructing to cut the substrate along the width each time the substrate is printed a predetermined length. The second cut program is provided for instructing, when printing of the one or plural pieces of data has finished, to cut the substrate along a line between a printed region and a non-printed region of the substrate.

10 Preferably, identification executed by the identification program is made based on a format identifier attendant to each piece of data.

 A line feed code detection program, a prescribed code detection program, and a line feed code deletion program can further be included in the basic program. The line feed code detection program is provided for detecting, when determination made by the determination program indicates that the one or plural pieces of data includes only the text data, a line feed code that may exist in the text data. The prescribed code detection program is provided for detecting a prescribed code that may exist immediately before or after the line feed code detected during detection of the line feed code by the line feed code detection program. The line feed code deletion program is provided for deleting, when detection made by the prescribed code detection program

indicates that the prescribed code is not detected through detection of the prescribed code by the prescribed code detection program, the line feed code detected through detection of the line feed code by the line feed code
5 detection program. The prescribed code includes a punctuation code representative of a punctuation mark, a delimiting code representative of a period, comma, colon, or semicolon, and itemization code designed for using at a head of each line of a printed document in an itemization.

10 A space character code detection program, a space counter control program, a space code number determination program, and a space code deletion program can further be included in the basic program. The space character code detection program is provided for detecting, when
15 determination made by the determination program indicates that the one or plural pieces of data include only the text data, a space character code that may exist in the text data. The space counter control program is provided for incrementing a count value of a space counter by one each
20 time when the space character code is consecutively detected from the text data, and initializing the count value of the space counter to zero when a code other than the space character code is detected during detection the space character code by the space character code detection program.
25 The space code number determination program is provided for

determining, when the space character code is not detected from the text data, that the count value of the space counter is equal to or greater than two indicating that two or more than two space character codes consecutively exist in the text data. The space code deletion program is provided for deleting the two or more than two space character codes when determination made in the space code number determination program indicates that the count value of the space counter is equal to or greater than two.

10 A space character detection program and a space character deletion program can further be included in the basic program. The space character detection program is provided for detecting that only one space character exists at a head of a first line of the text data when
15 determination made by the determination program indicates that the one or plural pieces of data includes only the text data. The space character deletion program is provided for deleting the one space character when determination made in the space character detection program indicates that a space
20 character exists at the head of the first line of the text data.

An arranging order setting program and a proportional image data producing program can further be included in the basic program. The arranging order setting program is
25 provided for setting, when determination made by the

005250" 22027 350

determination program indicates that the one or plural pieces of data includes only the image data, an order in which the one or plural pieces of data are arranged on a layout area. The proportional image data producing program is provided for producing a proportionally enlarged or proportionally reduced image data so that each piece of data is proportionally enlarged or proportionally reduced to a maximum size that fits within an unoccupied layout area, the proportionally enlarged or proportionally reduced image data being produced in the order in which the one or plural pieces of data are arranged on the layout area. The layout program in the basic program executes arranging in an orientation relative to the layout area, the proportionally enlarged or proportionally reduced image data on the layout area in the order set by the arranging order set program. A layout orientation determining program can further be included for determining the orientation in which the proportionally enlarged or proportionally reduced image data are arranged on the layout area so that a firstly produced image data has a size that fits within the layout area.

A divided layout area setting program can further be provided for dividing the layout area into a predetermined number of partitioned areas. The proportional image data producing program produces the proportionally enlarged or proportionally reduced image data so that each piece of data

for laying out one or more image data, each of which has been enlarged or reduced by the same proportion, into the image area; and text layout means for laying out one or more text data in the text area.

5 With this construction, the prescribed layout area is divided into a text area and an image area according to a predetermined ratio and a proportional image data and text data are automatically arranged in the appropriate areas. Accordingly, text and image data can be arranged in
10 prescribed areas in a well-organized and compact manner without the need for performing complex processes.

 In the present invention, the terms layout and arrange refer to the process of assigning addresses corresponding to relative positions within the prescribed areas for actual
15 displaying and printing to the text and image data, and writing these assignments to a storage device. Text data refers to data for character arrays containing characters and symbols that are expressed by a prescribed code such as Shift-JIS or UNICODE and includes data expressed in file
20 formats such as txt, html, rtf, and other formats written by prescribed word processing software. Image data refers to data representing diagrams and the like by setting two-dimensionally arranged dots on or off and includes data expressed in file formats such as gif, jpeg, and bmp. Table
25 data can be treated as text data by replacing the table grid

by boxed lines, but it is better treated as table data in order to avoid errors in line positions. Any other data that is not text or image data should be treated as whichever type is most appropriate.

5 The text layout means arranges text data in portions of the image area not occupied by image data. With this configuration, text data can be laid out in unoccupied areas of the image area, enabling the data to be arranged more compactly.

10 The occupation ratio is variable. Accordingly, an optimal ratio can be selected according to the proportional size of image data and text data, thereby enabling this data to be arranged in a more organized manner.

15 The data processing device can further include comparing means for comparing the enlarged/reduced ratio of the proportional image data to a predetermined minimum reduction percentage; and image area enlarging means for enlarging the proportion of the image area when the enlarged/reduced ratio of the proportional image data is
20 smaller than the minimum reduction percentage based on the results of the comparison performed by the comparing device. By enlarging the proportion of the image area when the enlarged/reduced ratio of the proportional image data is smaller than the minimum reduction percentage, it is
25 possible to prevent the creation of proportional image data

that has been reduced too much and is difficult to see clearly.

5 The data processing device can further include fill-in determining means for determining, when the text data is arranged in an over-hanging text area positioned adjacent to the image area, whether the number of characters in a line of text data displayed at a prescribed point size in the over-hanging text area exceeds a predetermined number. Accordingly, it is possible to prevent text data from becoming too small to see when they number of characters in a line of text data becomes less than the prescribed number.

10 The data processing device can further include text area enlarging means for enlarging the text area when the text data displayed at a prescribed point size is not contained within the text area. With this configuration, it is possible to display text data legibly without affecting the image display.

15 According to another aspect of the invention, there is provided a data processing device including line feed code/space character detecting means, prescribed code detecting means, line feed code deletion means, a space counter, count value determining means, and space character code deleting means. The line feed code/space character detecting means is provided for detecting a line feed code and a space character which may exist in text data. The

prescribed code detecting means is provided for detecting a prescribed code that may exist immediately before or after the line feed code detected by the line feed code/space character detecting means. The line feed code deletion means is provided for deleting, when detection made by the prescribed code detecting means indicates that the prescribed code is not detected, the line feed code detected by the line feed code detecting means. The space counter is incremented by one each time when the line feed code/space character detecting means consecutively detects the space character and is initialized to zero when a code other than the space character code is detected by the line feed code/space character detecting means. The count value determining means is provided for determining, when the code other than the space character code is detected by the line feed code/space character detecting means, that a count value of the space counter is equal to or greater than two indicating that two or more than two space character codes consecutively exist in the text data. The space character code deleting means is provided for deleting the two or more than two space character codes when determination made by the count value determining means indicates that the count value of the space counter is equal to or greater than two.

A blank line flag storing means, blank line flag control means, and space character deletion means can

005250" EEO2/250

further be included. The blank line flag storing means is provided for storing a blank line flag representing whether a character other than a space character exists before a line feed code in one logical line. The blank line flag control means is provided for controlling on/off of the blank line flag in such a manner that when the space counter is initialized, and when the line feed code/space character detecting means detects the line feed code and immediately before the space counter is initialized, the blank line flag is set to on. On the other hand, when the line feed code/space character detecting means detects a code or a character other than the line feed code and the space character and immediately before the space counter is initialized, the blank line flag is set to off. The space character deletion means is provided for deleting one space character existing at a head of a first line of the text data if the blank line flag is on when determination made by the count value determining means indicates that the value of the space counter is not two or more than two.

20 The data processing device can further include space character deletion means for deleting all space characters existing in the logical line if the blank line flag is on when the line feed code/space character detecting means detects the line feed code.

25

BRIEF DESCRIPTION OF THE DRAWINGS

005250" 00027950

The particular features and advantages of the invention as well as other objects will become apparent from the following description taken in connection with the accompanying drawings. in which:

5 Fig. 1 is a block diagram showing a label manufacturing device having a data processing apparatus according to the present invention;

Fig. 2 is a plan view showing the construction of the relevant portion in the cutting printer of Fig. 1;

10 Fig. 3 is a cross-sectional view showing the relevant portion of the cutting printer;

Fig. 4 is a side cross-sectional view showing the cutting mechanism for the cutting printer;

15 Fig. 5 is a conceptual diagram showing a perspective view of the approximate positional relationship between the roll shaft unit, the cutting mechanism, and the image forming mechanism of the cutting printer;

Fig. 6 is an explanatory diagram showing an example display for a browser program on the monitor display of Fig. 1;

20

Fig. 7 is an explanatory diagram showing an example display for an editor after reading both text and image data;

Fig. 8 is a flowchart of a process for identifying text and image data;

25

Fig. 9 is a flowchart of a process for reformatting text data;

Fig. 10 is a flowchart of a form feed and tack sheet cutting process for text data;

5 Fig. 11 is an explanatory diagram showing how text data is reformatted;

Fig. 12 is an explanatory diagram showing how text data is reformatted;

10 Fig. 13 is an explanatory diagram showing how text data is reformatted;

Fig. 14 is a flowchart of a first example layout process for image data;

15 Fig. 15 is a conceptual diagram showing the print image of an example image data layout according to the process of Fig. 14;

Fig. 16 is a flowchart of a second example layout process for image data;

20 Fig. 17 is a conceptual diagram showing the print image of an example image data layout according to the process of Fig. 16;

Fig. 18 is a flowchart of a third example layout process for image data;

Fig. 19 is a flowchart of a third example layout process for image data;

25 Fig. 20 is a flowchart of a third example layout

process for image data;

Fig. 21 is a conceptual diagram showing the print image of a prescribed area partition in an example image data layout according to the process of Fig. 18;

5 Fig. 22 is a flowchart of a first example layout process for text and image data;

Fig. 23 is a conceptual diagram showing the print image of an example text and image data layout according to the process of Fig. 22;

10 Fig. 24 is a flowchart of a second example layout process for text and image data;

Fig. 25 is a conceptual diagram showing the print image of an example text and image data layout according to the process of Fig. 24;

15 Fig. 26 is a flowchart of a third example layout process for text and image data; and

Figs. 27(a) through 27(d) are conceptual diagrams showing the print image of an example text and image data layout according to the process of Fig. 26.

20 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

A data processing method and device according to a preferred embodiment of the present invention will be described while referring to the accompanying drawings.

Fig. 1 is a block diagram showing the construction of
25 a label producing apparatus 100, which is the data

processing device of the present embodiment. The label
producing apparatus 100 includes a personal computer 110 and
a sheet processing device 11 connected to the personal
computer 110. First, the construction of the sheet
5 processing device 11 (hereinafter referred to as a cutting
printer) will be described.

Figs. 2 and 3 show the structure of the cutting
printer 11. The cutting printer 11 includes a frame 12
provided with left and right walls 9 and 10; a role sheet
10 unit 14 rotatably supported in the frame 12 and wrapped with
a tack sheet 13; a conveying mechanism 15 for reciprocally
conveying the tack sheet 13 in forward and backward
directions; a cutting mechanism 16 for cutting the tack
sheet 13 conveyed by the conveying mechanism 15; and an
15 image forming mechanism 17 disposed upstream from the
cutting mechanism 16 in relation to the forward conveying
direction (discharging direction) of the tack sheet 13 for
forming prescribed images on the tack sheet 13.

As shown in Fig. 5, the tack sheet 13 is wound about a
20 cylindrical core 55 to form a roll sheet 51 (see Fig 2).
The tack sheet 13 is formed of two layers: a pressure
sensitive adhesive sheet 18 having a printable top surface
and a pressure sensitive adhesive applied to the bottom
surface; and a mold release sheet 19 mounted on the bottom
25 surface of the pressure sensitive adhesive sheet 18.

As shown in Fig. 3, the conveying mechanism 15 includes a platen roller 24 serving as a component of the image forming mechanism 17; a discharge roller 25 disposed downstream from the cutting mechanism 16; and a slave roller 8 positioned opposite the discharge roller 25, between which two components the tack sheet 13 is interposed. A tension plate 7 supports a slave roller 8 and urges the slave roller 8 via a spring to apply pressure against the discharge roller 25. A first drive motor 21 disposed in the frame 12 drives the platen roller 24 and discharge roller 25 via a first gear train 22 in order to convey the tack sheet 13 reciprocally in the forward and reverse directions.

A gear 59 is provided on a flange gear (not shown) of a roll sheet unit 14. The first drive motor 21 drives the gear 59, the drive movement being transferred via a second gear train 27 having a planetary gear mechanism 26. The planetary gear mechanism 26 engages with the gear 59 only when conveying the tack sheet 13 in the reverse direction and does not engage with the gear 59 when conveying the tack sheet 13 in the forward direction. Therefore, when conveying the tack sheet 13 in the forward direction, the pulling force of the rotating platen roller 24 and discharge roller 25 rotates the roll sheet 51 on the tack sheet 13. When conveying the tack sheet 13 in the reverse direction, the roll sheet 51 is driven by the first drive motor 21 to

rotate in the reverse direction.

Next, the cutting mechanism 16 will be described. The cutting mechanism 16 is provided with a cutting head 29 for receiving the downstream end of the tack sheet 13; a cutting unit 30 positioned opposite the cutting head 29 for interposing the tack sheet 13 therebetween; and a carriage 31 on which the cutting unit 30 is detachably mounted.

As shown in Fig. 4, the cutting unit 30 has a cutter 43 for cutting the tack sheet 13 on its downstream end. An elevating mechanism (not shown) is disposed in the cutting unit 30 for selectively supporting the cutter 43 in a full cut position for cutting the mold release sheet 19 together with the pressure sensitive adhesive sheet 18 or a half cut position for cutting only the pressure sensitive adhesive sheet 18.

As shown in Fig. 2, the carriage 31 is attached to one point along a timing belt 34. The endless belt-shaped timing belt 34 is wrapped around a pair of pulleys 32 and 33 disposed one on each of the outer sides of the right walls 9 and 10. As shown in Fig. 3, a second drive motor 35 disposed outside the 10 drives the pulley 32. The drive movement of the second drive motor 35 is transferred to the pulley 32 via a third gear train 36 having a bevel gear or the like. As a result, the carriage 31 moves reciprocally in a direction approximately orthogonal to the conveying

direction of the tack sheet 13 (along the widthwise direction of the sheet).

As shown in Fig. 4, a main guide shaft 37 penetrates and is supported by the right walls 9 and 10 at a position near the end of the carriage 31 opposite the end on which the cutting unit 30 is mounted. The carriage 31 is slidingly supported on the main guide shaft 37. An auxiliary guide shaft 38 extending approximately parallel to the main guide shaft 37 is slidingly inserted through a central region of the carriage 31 between the end on which the cutting unit 30 is mounted and the end in which the main guide shaft 37 is inserted. A pair of rotating arms 39 disposed rotatably on the right walls 9 and 10 supports both ends of the auxiliary guide shaft 38.

An output shaft 42 on a solenoid 41 is coupled to one end of the auxiliary guide shaft 38 via an operating link 40. When the solenoid 41 is on (in an excited state), the urging force of a spring (not shown) works to push the lower end of the cutting unit 30 against the upper surface of the cutting head 29. When the solenoid 41 is off (not excited), the output shaft 42 of the solenoid 41 moves upward, forcing, via the operating link 40 and the auxiliary guide shaft 38, the end of the carriage 31 on which the cutting unit 30 is mounted to rotate upward about the fulcrum of the main guide shaft 37. Accordingly, the bottom end of the cutting unit

30 is separated from the top surface of the cutting head 29.

Next, the image forming mechanism 17 will be described. As shown in Figs. 2 and 3, the image forming mechanism 17 includes a line type thermal head 44 having a length approximately equivalent to the width of the tack sheet 13; and the platen roller 24 disposed in opposition to the thermal head 44 for interposing a tack sheet 13 therebetween.

Since the tack sheet 13 used in the cutting printer 11 described above is composed of both a pressure sensitive adhesive sheet 18 and a mold release sheet 19, the mold release sheet 19 can be quickly peeled away from the pressure sensitive adhesive sheet 18 in order to stick a tack sheet 13 having been printed with important information into a notebook, onto note paper, or the like. The width of the tack sheet 13 can be set to match the width of a notebook or note paper, such as 70 mm.

Next, the control system of the label producing apparatus 100, including the personal computer 110 serving as the data processing device of the present embodiment and the cutting printer 11, will be described with reference to Fig. 1.

The personal computer 110 includes a main unit 130 and a display 132, as well as a keyboard, a mouse, or the like (not shown). The main unit 130 has a CPU 134, a RAM 136, a
25 hard disk drive 138 and an input/output interface 140. The

CPU 134, RAM 136, and hard disk drive 138 are connected to each other and to the input/output interface 140 by a bus. In the present embodiment, the main unit 130 has a drive device (not shown) for reading a program stored on a floppy disk, CD-ROM, or other recording medium. An internal modem or similar device (not shown) is provided in the main unit 130 for connecting to a communication line 139.

The CPU 134 executes prescribed operations based on programs and data read from the hard disk drive 138 and RAM 136, as well as data supplied from the cutting printer 11. The RAM 136 temporarily stores text and image data and results of calculations performed by the CPU 134.

A general-purpose operating system including file management tools and a general-purpose browser program are installed on the hard disk drive 138. The file management tools enable the execution of file processes on files stored in the personal computer 110, such as delete, copy, move, and rename.

The browser program is capable of displaying on the display 132 text data and/or image data stored on the hard disk drive 138, floppy disk, CD-ROM, or other storage medium and text data and/or image data transferred to the personal computer 110 from a WWW server on the Internet via the communication line 139. Here, text data refers to data of character arrays displayed in general by HTML (hypertext

markup language), while image data refers to data in the GIF, JPEG, BMP, or like format that is pasted by tags into an HTML document.

Fig. 6 shows an example window of a browser program displayed on the display 132. Here, an HTML document is displayed in a data display area 150 of the browser. GIF images 152 and 153 are pasted in the top and bottom left portions of the data display area 150, respectively. A text portion 154 is displayed in the remaining area.

In addition to the software mentioned above, it is also possible to install an application program on the hard disk drive 138, such as a general-purpose word processing program or a drawing program, that is capable of processing text data and/or image data. For example, one could install a word processing program that is capable of both editing text data stored in a format specific to that software and displaying text data along with image data such as GIF, JPEG, or BMP data.

Further, an editing program (hereinafter referred to as "editor") is installed on the hard disk drive 138 for producing labels with the cutting printer 11. An editor is a program that enables the user to create text data and image data and arrange this data in a desirable layout, and subsequently prints this data onto the tack sheet 13 and cuts the tack sheet 13 at a prescribed position. The user

can edit the data by operating the personal computer 110 while viewing images to be printed on the sheet, the cutting position, and the like on the display 132.

There are a variety of ways in which text data and
5 image data can be read into an editor based on the type of operating system and application being used. These methods include having the user draw a rectangular box within the data display area 150 using a mouse; copying and pasting data using a clipboard; and selecting prescribed data using
10 file management tools such as drag-and-drop. When image data displayed on the display 132 is read into the editor, data having the same resolution as that on the display 132 is transmitted to the editor.

The editor functions to automatically edit loaded text
15 and image data based on the types and combinations of data. This is described in more detail later. However, the editor includes such automatic editing functions as a function to identify whether individual loaded data is text or image data; a function to determine whether the identified data is
20 only text data, only image data, or both text and image data; and a function to layout data according to patterns that differ according to the result of the determination.

As part of the data layout function, the editor inserts one line feed code between each data, when the
25 loaded data is text data only, in order to distinguish each

of the plurality of text data. The editor also arranges each text data at an address corresponding to the relative position in the prescribed area displayed on the display 132. At this time, each text data is reformatted to make the displayed text easier to read. Text data read from HTML documents in particular often have a line feed code inserted between each displayed line and many indentations. When printed in a format having a different number of characters per line, this can generate line feeds in the middle of lines and lines beginning from irregular positions when space characters fall at the beginning of the line. This makes the document extremely difficult to read. Deleting all of the line feed codes and space characters, however, would only make legibility worse. Therefore, the method of the present embodiment is to delete only those line feed codes and space characters that meet specific conditions according to prescribed rules.

As another part of the data layout function, the editor reduces or enlarges the data when the loaded data is only image data such that the image data fits within a prescribed area, and assigns an address to this image data corresponding to the relative position in the prescribed area. When reducing image data, the resolution of the image can be reduced through a process of thinning dots. When enlarging the image data, a process for interpolating dots

can be performed during layout. When there is a plurality of image data, the order of layout for each image data is determined and images having a higher priority can be displayed larger in order that such high priority images can be more easily seen. In another example of the present embodiment, each image data is individually enlarged or reduced and arranged in independent partitioned areas without placing weight on individual image data.

As another part of the data layout function, when the loaded data is a combination of text and image data, the prescribed area for layout is divided into a text area for laying out text data and an image area for laying out image data according to a prescribed occupation ratio. Next, the text and image data are assigned addresses corresponding to relative positions in the text areas and image areas, respectively, as described above. By keeping this occupation ratio variable, it is possible to select an optimal ratio based on the ratio of image data and text data sizes in order to display the data in a well-organized, easy to read manner.

Fig. 7 shows an example display on the display 132 when the editor has read both text and image data. A data display area 156 of the editor includes a print area 157 having a width equal to that of the tack sheet 13 (enlarged or reduced to fit on the display 132). The print area 157

is divided into the image area 158 and a text area 159, excluding the margin space. One or more image data arranged according to a prescribed pattern is displayed in the image area 158, while one or more text data arranged according to a prescribed pattern is displayed in the text area 159 based on user specified fonts, character sizes, and character and line spacing. It is possible to display text data in HTML documents and the like using the same character fonts, colors, and sizes specified in the documents.

10 The print area 157 is enlarged or reduced according to an enlargement/reduction ratio prescribed for the tack sheet 13 and displayed in the display 132, enabling the user to modify this enlargement/reduction ratio as desired. The image area 158 and text area 159 are also enlarged or reduced by the same ratio used for the print area 157. The scope of the print area 157 displayed on the display 132 is stored in a prescribed area of the RAM 136 as a portion of print data, with the upper left corner of the print area 157 assigned the top address, that is, the point of origin.

15 Addresses for each of the image and text data arranged in the image area 158 and text area 159 are also stored in prescribed areas of the RAM 136 as a part of the print data.

20 A form feed process to begin a new page is automatically performed whenever the length of the print area 157 reaches approximately 100 mm. If this form feed

25

process were not performed when the size of text data and the like displayed in the print area 157 becomes too large, the tack sheet 13 would not be cut, thereby forming a long sheet of tack sheet 13 that is not convenient for pasting
5 into notebooks and the like. Therefore, the present invention automatically performs a form feed at each length of approximately 100 mm and lays out the subsequent data in the print area 157 for the next page. As a result, the tack sheet 13 is cut after printing approximately 100 mm. It is
10 also possible for the user to select a desirable position for the form feed. The address of the form feed position is also stored as a part of print data in a prescribed area of the RAM 136.

In addition to form feed positions, the editor also
15 issues commands to cut the tack sheet 13 when printing of all text and images is complete. This process can prevent wasteful use of the tack sheet 13 by eliminating unused margins at the bottom of the printing area when less than a page full of data is printed or when a small area of print
20 data continues onto the next page after a form feed. This process also eliminates the need for the user to cut the tack sheet 13 discharged from the cutting printer 11. The address of the cutting position is also stored as a part of print data in a prescribed area of the RAM 136.

25 An appended data display area 160 is provided at the

top of the data display area 156 for displaying the date and
URL of the data source for the current print data. A
command display area 161 is provided beneath the appended
data display area 160 for displaying a menu of such commands
5 as Print, Save, Character, and Layout, enabling the user to
select and execute one of these commands. While viewing the
layout of text and images displayed in the data display area
156, the user can modify the layout when necessary by
performing such editing operations as inserting or deleting
10 character arrays. Editing operations are easy to perform
with this configuration because the text and images
displayed in the print area 157 are in a WYSIWYG (what you
see is what you get) format. When the user selects the
Print command in the command display area 161, print data
15 edited with the editor, including image data, text data, and
their corresponding address data, as well as the above-
described print scope data, feed form position data, and
sheet cutting position data, are transmitted to the RAM 118
of the cutting printer 11. Then, the tack sheet 13 is
20 printed and cut based on commands issued from the CPU 114.

The cutting printer 11 includes an input/output
interface 112. The input/output interface 112 is connected
to the input/output interface 140 of the personal computer
110. Within the cutting printer 11, the input/output
25 interface 112 is also connected to a CPU 114, a ROM 116, a

RAM 118, a head drive circuit 120 for driving a thermal head 44 (refer to Figs. 2 and 3), motor drive circuits 122 and 124 for driving a first drive motor 21 and a second drive motor 35 (refer to Fig. 3), respectively, and a solenoid drive circuit 126 for driving a solenoid 41 (refer to Fig. 4).

The ROM 116 stores programs and data required for controlling operations of the cutting printer 11. The CPU 114 performs prescribed operations according to programs and data read from the ROM 116 and data supplied from the personal computer 110 and issues control signals to the head drive circuit 120 and the like. The RAM 118 temporarily stores data supplied from the personal computer 110, results of calculations by the CPU 114, and other data.

Next the process of creating labels using a label producing apparatus 100 with the construction described above will be described in detail with reference to Figs. 8-27. Here, the label producing apparatus 100, which includes the personal computer 110 and cutting printer 11, is the data processing device of the present embodiment.

First, a process for identifying text and image data will be described with reference to Fig. 8. In Step S1, the user operates the cutting printer 11 to start at least one of the browser and word processing programs and to display text and/or image data in the display 132. Also in Step S1,

the user selects desired data displayed in the display 132 using the copy and paste functions or another method in the browser or word processing program. Instead of using the browser program or the like, the user can select data to
5 process by performing the drag-and-drop method on a file using the file operating tools. After selecting data or a file in this way, the user starts the editor by performing prescribed startup operations.

In Step S2, it is determined whether the selected data
10 includes a format identifier. A format identifier is text data written in the top portion of the data indicating the type of data, such as HTML, TXT, GIF, or BMP. When data is selected using copy and paste from the browser or word processing program, the browser or other application program
15 in which the data was displayed writes the format identifier. If the data includes a format identifier (Yes in S2), then the process jumps to Step S5. If there is no identifier (No in S2), then the process continues from Step S3. Cases in which there is no format identifier may occur when a file is
20 selected by drag-and-drop in the file operating tools and the editor cannot directly reference the contents of the file.

In Step S3, it is determined whether the selected data is a file. If the data is a file (Yes in S3), then the
25 process continues from Step S4. If not (No in S3), then the

process jumps to Step S11. Cases in which the data is not a file include, for example, simple URLs and simple folder names. In Step S4, the format of the data is determined based on the file extension. The extension is the letters following a period in the filename that indicate the type of the file.

In Step S5, it is determined whether the data format is HTML or RTF. More specifically, the CPU 134 analyzes the format identifier in the top portion of the data or the file extension. If the format is either HTML or RTF (rich text format) (Yes in S5), then the process continues from Step S6. If the format is not HTML or RTF (No in S5), the process jumps to Step S7. In Step S6, data following diagram tags in the HTML or RTF document is treated as image data and all other data is read as text data. Data that indicates these data types (whether the data is image or text data) is linked to addresses at which the individual image and text data are stored and stored in a prescribed area of the RAM 136 as individual data identifying data.

In Step S7, the CPU 134 determines whether the data format is an image format such as BMP, GIF, or JPEG, similar to the process of Step S5. If the data is in an image format (Yes in S7), then the process continues from Step S8. If the data is not an image format (No in S7), then the process jumps to Step S9. In Step S8, the data is read as

image data. Also, as in Step S6, data that indicates this data is image data is linked to addresses at which the individual image data is stored and is stored in a prescribed area of the RAM 136 as individual data identifying data.

In Step S9, the CPU 134 determines whether the data format is a text format, similar to the process of Step S5. If the data is in a text format (Yes in S9), then the process continues from Step S10. If the data is not in a text format (No in S9), then the process jumps to Step S11. In Step S10, the data is read as text data. Also, as in Step S6, data that indicates this data is text data is linked to addresses at which the individual text data is stored and is stored in a prescribed area of the RAM 136 as individual data identifying data.

In Step S11, the data is determined to be an invalid format either because the data format is not HTML, RTF, an image format, or a text format or because the data is not a file and does not include a format identifier, and the process of reading the selected data is canceled. At this time, an operation for notifying the user is performed. For example, a message is displayed in the display 132 informing the user that the data format is invalid or that the data read has been canceled.

By conducting the steps described above repeatedly for

each individual data read by the editor, it is possible to identify whether individual data is text or image data. When the editor also handles data created by a word processing program, the CPU 134 should also determine in
5 Step S5 whether the data is of the format created by that word processing program. For example, if we call the format produced by the word processing program "ABC format," then the CPU should determined whether the data.format is ABC, HTML, or RTF.

10 Now, by reading individual data identifying data stored in the RAM 136 into the CPU 134, it is possible to determine when data read into the editor is only text data, only image data, and both text and image data. The results of these determinations are stored as combination
15 determining data in a prescribed area of the RAM 136. When the data format is determined to be either HTML or RTF in Step S5 of Fig. 8 and the document contains diagram tags, then this data can be considered to contain both text and image data.

20 Next, a method for processing text data with the editor when data read by the editor is determined to be only text data by the above process will be described. When the combination determining data indicates that data read by the editor is only text data, the text is arranged in the
25 address area corresponding to the area of the print area 157

005250" 2502/950

shown in Fig. 7, excluding the margins. Here, the first text data is reformatted as described below and assigned to the top address of the print area 157. This address is written to a prescribed area of the RAM 136 and the first text data is displayed in the print area 157. Subsequently, a line feed code is inserted to move to the next line. Next, the second text data is reformatted and assigned to the next address. The address is written to a prescribed area of the RAM 136 and the second text data is displayed in the print area 157. This procedure is repeated until the last text data has been processed. During this process, a control process is performed to write line feed position data and sheet cutting position data to memory in order that the tack sheet 13 is cut each time the length of the print area 157 exceeds a prescribed length and also directly after the final text data has been printed. Below this process will be described in more detail with reference to Figures 9-13.

First, the process of reformatting text data will be described with reference to Fig. 9. In Step T1, a space counter stored in a prescribed area of the RAM 136 is initialized to 0. In Step T2, a blank line flag stored in a prescribed area of the RAM 136 is set to on. In Step T3, a character pointer stored in a prescribed area of the RAM 136 is moved to the character code at the head of the text data. Here, the space counter represents the number of space

characters (spaces, tab codes, and the like) that exist consecutively in the text data. The blank line flag represents whether a character other than the space character exists in one logical line.

5 In Step T4, it is determined whether the process of reformatting one text data is completed, the ideas, whether the position of the character pointer exceeds the position of the final character in the text data. If the character pointer exceeds the final character position (Yes in T4),
10 then the text data has been reformatted and the process ends. If not (No in T4), the process continues to Step T5.

In Step T5, it is determined whether the character code pointed to by the character pointer is a line feed code. If the character pointer points to a line feed code (Yes in
15 T5), the process continues to Step T6. If the character code is not a line feed code (No in T5), then the process jumps to Step T11.

In Step T6, it is determined whether the character directly before the line feed code is a punctuation mark or
20 other delimiting code, such as a ".", ",", ":", ";", and the like, or whether the character directly after the line feed code (even when the character follows the line feed code after 1-3 space characters) is an itemization code normally used at the head of each line in an itemization, such as a
25 ". ", "1. ", "(1)", "①", "A. ", or the like. If either of the

conditions described above are met (Yes in T6), the process continues to Step T8. If the conditions are not met (No in T6), the process continues to Step T7 and the line feed code is deleted.

5 Line feed codes following directly after punctuation marks and the like are not deleted in Step T6 because deleting them would remove paragraph divisions and allow text in the document to continue without interruption for a long time. This would be difficult to read. Further, line
10 feed codes followed directly by itemization symbols are also not deleted because displaying an entire itemized passage on the same line without line feeds would destroy the clarity intended by the itemization.

 In Step T8, it is determined whether the blank line
15 flag is on. If the blank line flag is on (Yes in T8), then the process continues to Step T9. If the blank line flag is set to off (No in T8), then the process jumps to Step T10. The blank line flag being set to on in Step T8 indicates that no character other than the space character exists in
20 that logical line, that is, all characters up to the line feed code in the present logical line are space characters. Therefore, in Step T9, all space characters in the current logical line, that is, all space characters from the position just after the previous line feed code or from the
25 start of the document up to the current position, are

deleted. Next, in Step T10, the blank line flag is set to on and the process jumps to Step T18.

In Step T11, it is determined whether the character code currently pointed to by the character pointer is a space character. If the character code is a space character (Yes in T11), then the process continues to Step T12. If the character code is not a space character (No in T11), then the process jumps to Step T13. In Step T12, the space counter is incremented 1 and the process jumps to Step T19.

In Step T13, it is determined whether the value of the space counter is greater than or equal to 2. Here, the count value is set to 2 or greater because removing all single space characters, commonly inserted between words in most European languages, would make it difficult for the user to decipher the text. If the value of the space counter is greater than or equal to 2 (Yes in T13), then the process continues to Step T14. If the value of the space counter is less than 2 (No in T13), then the process jumps to Step T15.

In Step T14, all space characters up to the current position are deleted since it is determined by the value of the space counter being 2 or greater that more spaces (such as indentations and the like) than necessary were inserted into the original text data. Subsequently, the process continues to Step T17.

arrows (↓) in these drawings represent line feed codes and are not actually printed.

Fig. 11 shows the original text data as it appears in the browser, having a line feed code added to the end of each line. Lines 3-6 have been indented and line 7 contains only a line feed code. Fig. 12 shows the same text data as it is displayed in a text area having fewer characters per line than that of Fig. 11. In the text data shown in Fig. 12, line feeds occur in the middle of lines at inconvenient places, and spaces remain in the indented lines, making it very difficult to read.

Fig. 13 shows the text data after being processed according to the method of the present embodiment. As can be seen in Fig. 13, the space at the head of the first line is deleted after performing Steps T4-T11, returning to T4 via T12, and finally performing Steps T13, T15, and T16. The spaces at the head of each indented line 3-6 are deleted after performing Steps T4-T11, returning to T4 via T12 and T19 and repeating as often as there are spaces, and finally performing Steps T11, T13, and T14. The line feed codes at the ends of lines 3-5 and line 7 are also deleted in Steps T4-T7. However, the line feed codes at the ends of lines 2, 6, and 8-11 are left in place since only Steps T4-T6 and not Step T7 are executed.

Hence, when the print area has less characters per

line than the original shown in Fig. 11, the method of the present embodiment prevents line feeds from occurring in the middle of lines, except for specific cases, and does not leave spaces in indented lines. Further, lines with itemization symbols such as the "." symbol are preserved in the same itemized format without deleting their line feed codes. Line feed codes occurring directly after the "." punctuation mark are also not deleted in order to clearly distinguish each line. Single spaces existing at the beginning of lines are deleted to keep the beginning of each line flush with one another. The line feed code in the seventh line of Fig. 11 is deleted to keep the text compact. Hence, the method of the present embodiment can display text data in a compact, well-organized manner without requiring complex processes, even when the number of characters per line is changed. As a result, text printed on an area as narrow as the tack sheet 13 is still easy to read.

Next, a form feed and sheet cutting process for the tack sheet 13 when arranging only text data will be described with reference to Fig. 10. The example described herein refers to printing one text data having a large size that extends over a plurality of pages. However, the same process is performed when printing a plurality of text data, excluding the case in which one line with only a line feed code is provided between each text data.

variable Y is set to the Y coordinate at the head of the next page (the start print position). In Step U8, data for conveying the tack sheet 13 in order to line up the start print position is written to a prescribed area of the RAM
5 136, and the process continues to Step U9.

In Step U9, text data for the current line pointed to by the line pointer is written to a prescribed area of the RAM 136 in order to print that text data on the tack sheet 13. In Step U10, data for conveying the tack sheet 13 to
10 advance exactly the width of the current line is written to a prescribed area of the RAM 136 in order to print the next line.

In Step U11, the variable Y is set to the sum of itself and the width of the current line. In Step U12, the
15 line pointer is moved to the next line, and the process returns to Step U3.

With the process described above, it is possible to create labels that can be easily pasted into a notebook or the like by cutting the tack sheet 13 to prescribed lengths
20 when the text data extends over a plurality of pages. If the text data is less than the length of one page, then the tack sheet 13 is cut at a position just after the end of the text data. Accordingly, it is possible to create printed labels of a compact size and without wasteful margins at the
25 bottom of the sheet, thereby helping to reduce costs. This

process also eliminates the bothersome need for the user to cut such marginal areas of labels discharged from the cutting printer 11.

5 Next the process of reformatting image data with the editor will be described for the case when data read by the editor is determined to be only image data according to the process described in Fig. 8. When the combination determining data indicates that data read by the editor is only image data, the image data is arranged in the address
10 area corresponding to the area of the print area 157 shown in Fig. 7, excluding the margins.

 A first example for processing only image data will be described with reference to Figs. 14 and 15. In this example, each of the plurality of selected image data is
15 assigned a priority and images are arranged in the address area corresponding to the first page of the tack sheet 13 in order, beginning from images with the highest priority.

 In the present example, n selected image data of a rectangular shape are arranged in the address area
20 corresponding to the rectangular print area on one page of a tack sheet 13, as shown in Fig. 15. The priority for arranging these n image data in this example is set according to size (number of bytes) from largest to smallest. In other words, the CPU 134 determines the order of priority
25 by comparing the size of each image data. This order is

005250" 8202/960

written to a prescribed area of the RAM 136. When arranging the image data, images having the largest size are laid out first according to the order in which they are written in the RAM 136. With this method, large image data can be displayed and printed at a large size. Alternatively, the order of priority for arranging image data can be set according to the order in which the image data was selected or can be determined arbitrarily by the user. Regardless the method used, the CPU 134 sets this order of priority and writes the same to a prescribed area of the RAM 136.

Based on the order written to the RAM 136, each original image data is proportionally enlarged or proportionally reduced to form a proportional image data. This proportional image data is arranged inside the address area corresponding to an unoccupied portion of the print area. At this time, each image data is proportionally enlarged or reduced to the maximum size that can fit within the unoccupied layout area. Further, each image data is laid out in the same direction. Accordingly, a plurality of images printed on one tack sheet can be viewed at a glance without requiring the user to change the viewing angle for each image.

As shown in Fig. 15, X is set to the length (number of dots) corresponding to the width of the print area on the tack sheet, while Y is set to the length corresponding to

the length of one page of the tack sheet 13. An n number of image data are proportionally enlarged or reduced and laid out in the address area corresponding to this print area (X, Y). Let us say that the original size of the nth image data as displayed in the browser is (xn, yn) and the size of the proportional image data in the editor window after the same data has been proportionally enlarged or reduced is (xn', yn'). By setting the top left point in the image area to the reference point, we can set B as the distance of the image in the Y direction when the proportional image data occupies the entire width X, and A as the distance of the image in the X direction when the proportional image data occupies the entire length Y.

In Step E1 of Fig. 14, the parameter n is set to 1 and the above variables A and B are set to 0. In Step E2, the width xn' of the proportional image data obtained by enlarging or reducing the nth image data having a width xn is set to $X-A$ and stored in memory.

In Step E3, the length yn' of this enlarged or reduced image data is found based on the width xn' determined in Step E2 ($yn' = (yn/xn)*xn'$), and this length yn' is compared to the difference Y-B. If $yn' \leq Y-B$ (Yes in E3), then the process continues to Step E4. If $yn' > Y-B$ (No in E3), then the process jumps to Step E5.

If $yn' \leq Y-B$, this signifies that the enlarged or

005250" EEO/960

reduced length y_1' for the first image data can fit within the length Y of the print area on one page when the enlarged or reduced width x_1' for the same data is set to the entire width X of the print area. In this case, the proportional image data (xn' , yn') determined in Steps E2 and E3 is arranged in the unoccupied image area. Then, in Step E4, the variable B is set to $B + yn'$ and stored in memory.

On the other hand, if $yn' > Y - B$, this signifies that the enlarged or reduced length y_1' for the first image data cannot fit within the length Y of the print area on one page when the enlarged or reduced width x_1' for the same data is set to the entire width X of the print area. In this case, the Y direction is used in place of the X direction as the reference for proportionally altering the image size. Accordingly, in Step E5, the length yn' of the enlarged or reduced image data is set to $Y - B$ and stored in memory.

In Step E6, the width xn' of this enlarged or reduced image data is found based on the length yn' determined in Step E5 ($xn' = (xn/yn) * yn'$). In Step E7, the variable A is set to $A + xn'$ and stored in memory.

In Step E8, the proportional image data (xn' , yn') determined in Steps E2 and E3 or in Steps E5 and E6 is laid out in the address area corresponding to the unoccupied image area beginning from the top address, that is, the upper left corner. At this time, the percentage of

enlargement or reduction from the original image data along with addresses indicating the layout position range of the proportional image data are associated with the addresses of the original image data and written as part of the print data to a prescribed area of the RAM 136.

5 In Step E9, it is determined whether the variable A is equal to X ($A = X$) or the variable B is equal to Y ($B = Y$). If one of these two conditions is met (Yes in E9), then this indicates that the print area on one page is filled with image data, and the process jumps to Step E11. In Step E11, a cutting position for cutting the tack sheet 13 in the widthwise direction at the length Y is written as part of the print data to a prescribed area in the RAM 136.

10 However, if neither of the above two conditions is met (No in E9), then this indicates that the print area for one page still has some blank space and the process continues to Step E10. In Step E10, it is determined whether there is another image data. If another image data exists (Yes in E10), then in Step E12 the parameter n is incremented by 1 and the process returns to Step E2. If no image data remains (No in E10), then the process continues to Step E13.

20 In Step E13, it is determined whether the variable A is 0. If the variable A equal 0 (Yes in E13), then this indicates that the bottom portion of the print area on the page includes an area with no printing and the process

continues to Step E14. In Step E14, a cutting position for cutting the tack sheet 13 in the widthwise direction at a position B is written as a part of the print data to a prescribed area of the RAM 136. However, if the variable A
5 is not 0 (No in E13), then this indicates that the current page will be printed across the entire length Y of the print area. Therefore, the process jumps to Step E11, in which a cutting position for cutting the tack sheet 13 in the widthwise direction at the length Y is written as part of
10 the print data to a prescribed area of the RAM 136.

With this process, it is possible to arrange one or a plurality of image data in address areas corresponding to the printing areas by enlarging or reducing the images and to achieve a compact and well-organized display in the
15 editor without requiring complex editing processes.

Next, a second example of a layout process when only image data is read will be described with reference to Figs. 16 and 17. In this example, image data is laid out according to a method similar to that described in the first
20 example. However, one page of the tack sheet 13 is treated as an area elongated in the horizontal direction rather than in the vertical direction, as in the first example. Therefore, in the first example image data that is longer in the vertical direction can be displayed relatively large in
25 the layout, while image data longer in the horizontal

direction is displayed relatively smaller. In contrast, in the second example image data longer in the horizontal direction is displayed relatively larger.

As shown in Fig. 17, n selected image data of a rectangular shape are arranged in the address area corresponding to the rectangular print area on one page of a tack sheet 13. Here, the tack sheet 13 is rotated 90 degrees from that shown in Fig. 15 in order that the length Y side corresponding to the length of one page of the tack sheet 13 in Fig. 15 is rotated to the top side of the image. The priority for arranging these n image data in this example is set according to size or the like and written to a prescribed area of the RAM 136. Based on the order written to the RAM 136, proportional image data is arranged at a maximum size and in a common layout direction inside the address area corresponding to an unoccupied portion of the print area.

In Step F1 of Fig. 16, the parameter n is set to 1 and the variables A and B defined in the first example are set to 0. In Step F2, the width xn' of the proportional image data obtained by enlarging or reducing the nth image data having a width xn is set to $Y-B$ and stored in memory.

In Step F3, the length yn' of this enlarged or reduced image data is found based on the width xn' determined in Step F2 ($yn' = (yn/xn)*xn'$), and this length yn' is compared

to the difference $X-A$. If $yn' \leq X-A$ (Yes in F3), then the process continues to Step F4. If $yn' > X-A$ (No in F3), then the process jumps to Step F5.

If $yn' \leq X-A$, this signifies that the enlarged or reduced length yl' for the first image data can fit within the entire width X of the print area on one page when the enlarged or reduced width xl' for the same data is set to the entire length Y of the print area. In this case, the proportional image data (xn' , yn') determined in Steps F2 and F3 is arranged in the unoccupied image area. Then, in Step F4, the variable A is set to $A + yn'$ and stored in memory.

On the other hand, if $yn' > X-A$, this signifies that the enlarged or reduced length yl' for the first image data cannot fit within the entire width X of the print area when the enlarged or reduced width xl' for the same data is set to the entire length Y of the print area on one page. In this case, the X direction is used in place of the Y direction as the reference for proportionally altering the image size. Accordingly, in Step F5, the length yn' of the enlarged or reduced image data is set to $X-A$ and stored in memory.

In Step F6, the width xn' of this enlarged or reduced image data is found based on the length yn' determined in Step F5 ($xn' = (xn/yn)*yn'$). In Step F7, the variable B is

set to $B + xn'$ and stored in memory.

In Step F8, the proportional image data (xn' , yn') determined in Steps F2 and F3 or in Steps F5 and F6 is laid out in the address area corresponding to the unoccupied image area beginning from the top address, that is, the upper left corner. At this time, the percentage of enlargement or reduction from the original image data along with addresses indicating the layout position range of the proportional image data are associated with the addresses of the original image data and written as part of the print data to a prescribed area of the RAM 136.

In Step F9, it is determined whether the variable A is equal to X ($A = X$) or the variable B is equal to Y ($B = Y$). If one of these two conditions is met (Yes in F9), then this indicates that the print area on one page is filled with image data, and the process jumps to Step F11. In Step F11, a cutting position for cutting the tack sheet 13 in the widthwise direction at the length Y is written as part of the print data to a prescribed area in the RAM 136.

However, if neither of the above two conditions is met (No in F9), then this indicates that the print area for one page still has some blank space and the process continues to Step F10. In Step F10, it is determined whether there is another image data. If another image data exists (Yes in F10), then in Step F12 the parameter n is incremented by 1

and the process returns to Step F2. If no image data remains (No in F10), then the process continues to Step F13.

In Step F13, it is determined whether the variable A is 0. If the variable A equal 0 (Yes in F13), then this indicates that the bottom portion of the print area on the page includes an area with no printing and the process continues to Step F14. In Step F14, a cutting position for cutting the tack sheet 13 in the widthwise direction at a position B is written as a part of the print data to a prescribed area of the RAM 136. However, if the variable A is not 0 (No in F13), then this indicates that the current page will be printed across the entire length Y of the print area. Therefore, the process jumps to Step F11, in which a cutting position for cutting the tack sheet 13 in the widthwise direction at the length Y is written as part of the print data to a prescribed area of the RAM 136.

With this process, image data elongated in the horizontal direction is displayed or printed larger than in the first example process.

While either the first or second example can be chosen arbitrarily, it is desirable to employ the first process when the data having the highest priority is elongated vertically and the second process when the data having the highest priority is elongated horizontally in order that data having a high priority is displayed at a larger size.

Accordingly, it is a good idea to compare the vertical and horizontal lengths of the data having the highest priority after determining the order of priority.

Next, a third example of a layout process when only
5 image data is read will be described with reference to Figs. 18-21. In this example, no weight is attached to any of a plurality of selected image data. Rather the print area is divided into independent areas each associated with one of the image data, and each image data is enlarged or reduced
10 to fit into its corresponding area at a maximum size.

In Step G1, a minimum reduction percentage MR is set to a predetermined allowable percentage for reducing the image data. This is to prevent the image data from being reduced so much as to become unrecognizable.

15 In Step G2, image data is read into the editor using one of the method's described above. In Step G3, a partition number N is set to the number of areas for partitioning the rectangular print area on one sheet of the tack sheet 13. This partition number N can be set in anyway,
20 for example, equal to the number of image data read.

In Step G4, the area on one sheet of the tack sheet 13 is divided into partitions based on a partition number N set in Step G3. For example, it is possible to divide the area on one sheet of the tack sheet 13 into three areas of equal
25 size using dividing lines along the x-axis, as shown in Fig.

21. The area on the tack sheet 13 can also be divided according to any desired layout to form partitioned areas of different sizes. A number is assigned to each of these partitioned areas in order, for example, beginning from the upper left.

In Step G5, a parameter I in memory is set to 1. The parameter I identifies the image being laid out and the corresponding partitioned area. And order of priority for layout can be predetermined for each image as described in the first example. In Step G6, proportional image data is laid out in the corresponding area after enlarging or reducing the Ith image data to the maximum size possible for fitting in the Ith partitioned area.

In Step G7, the parameter I is incremented by 1. In Step G8, it is determined whether the parameter I is less than the sum $N + 1$. If the parameter I is less than $N + 1$ (Yes in G8), then the process returns to Step G6 and repeats the layout process for the next image data. However, if the parameter I is equal to or greater than $N + 1$ (No in G8), then the process continues to Step G9 to print the data with the cutting printer 11.

Here, the process in Step G6 will be described in more detail with reference to Fig. 19. In Step G61, a calculation is performed to determine how much the vertical length of the image data needs to be enlarged or reduced in

order to fit into the corresponding partitioned area at a maximum size. To accomplish this, a vertical ratio VR is set to the result of dividing the length of the vertical side on the partitioned area by the length of the vertical side on the image data. In Step G62, a horizontal ratio HR is calculated in the same way as the vertical ratio VR was calculated in Step G61.

In Step G63, the size relationship of the vertical ratio VR and the horizontal ratio HR is determined. If the horizontal ratio HR is the larger of the two (Yes in G63), this indicates that the image data must be enlarged or reduced based on the vertical ratio VR in order to achieve a maximum size for the partitioned area. Therefore, the process continues to Step G64 and the vertical ratio VR is written to a prescribed area of the RAM 136 as a zoom ratio ZR for the image data. However, if the vertical ratio is the larger of the two (No in G63), this indicates that the image data must be enlarged or reduced based on the horizontal ratio HR in order to achieve a maximum size. Therefore, the process jumps to G65, where the horizontal ratio HR is written to a prescribed area of the RAM 136 as the zoom ratio ZR for the image data.

In Step G66, the zoom ratio ZR of the image data is compared to the minimum reduction percentage MR set in Step G1. If the zoom ratio ZR is equal to or greater than the

minimum reduction percentage MR (No in G66), then the normal layout process is performed in Step G68. In other words, the proportional image data that has been proportionally reduced or enlarged from the original image data based on the zoom ratio ZR determined in Step G64 or Step G65 is laid out in the address area of the corresponding partitioned area beginning from the top address (the upper left). At this time, the percentage of enlargement or reduction from the original image data along with addresses indicating the layout position range of the proportional image data are associated with the addresses of the original image data and written as part of the print data to a prescribed area of the RAM 136.

However, if the zoom ratio ZR is less than the minimum reduction percentage MR (Yes in G66), then the image data has been reduced too much and the process for arranging image data partitions is performed in Step G67.

Here, the process for arranging image data partitions of Step G67 will be described in more detail with reference to Fig. 20. In Step G671, a number of remaining partitioned areas NN is found based on the remaining partitioned areas on the current page of the tack sheet 13, including the partitioned area of the current layout process, in which proportional image data has not been laid out. In Step G672, a parameter J in memory is set to the value 2. In Step G673,

the parameter J is compared to the remaining partitioned areas NN. If the parameter J is larger than the variable NN (Yes in G673), this indicates that there is no margin for dividing the image data and the process jumps to Step G679.

5 In Step G679, a warning message indicating that the image data cannot be printed is displayed on the current page. The user can be notified of the problem by displaying the warning on the display 132, or alternatively by issuing a sound from a speaker (not shown) or the like.

10 However, if the parameter J is less than or equal to the variable NN (No in G673), then the image data is partitioned into a number equivalent to the parameter J in Step G674. For example, if the print area on the tack sheet 13 is divided into partitioned areas of equal widths using
15 dividing lines along the x-axis, as shown in Fig. 21, then the image data can also be divided along the x-axis into areas of equal length to match the partitioned areas of the print area.

In Step G675, a calculation is performed as described
20 in Steps G61-G65 to determine a divided zoom ratio DZR for each image data that has been divided into J parts for layout in J partitioned areas. In Step G676, the divided zoom ratio DZR is compared to the minimum reduction percentage MR set in Step G1. If the divided zoom ratio DZR
25 is equal to or greater than the minimum reduction percentage

MR (No in G676), then the layout process described in Step G68 is performed in Step G678 for the image data divided into J parts.

5 However, if the divided zoom ratio DZR is less than the minimum reduction percentage MR (Yes in G676), then the parameter J is incremented by 1 in Step G677. The process returns to Step G673 and the above steps are repeated.

10 With this process, space can be generated on the right side of each partitioned area, but the image data is laid out independently in its own partitioned area. Therefore, there is little chance that image data having lower priority will be displayed at a smaller size, as in the first example. Further, all image data is laid out in a prescribed common direction, thereby enabling the user to view a plurality of
15 image data at once without changing the viewing angle. In addition, it is possible to detect in advance whether proportional image data will be reduced so much as to be difficult to see clearly by comparing a zoom ratio to a predetermined minimum reduction percentage when laying out
20 image data in a partitioned area. When the zoom ratio is smaller than the minimum reduction percentage, the image data is divided into a plurality of partitioned areas and arranged as proportional image data, thereby preventing relatively large image data from being displayed at a small
25 size. Further, a warning is issued in prescribed cases in

order to notify the user that the zoom ratio of proportional image data is smaller than the minimum reduction percentage even when arranging the proportional image data in a plurality of partitioned areas remaining in a prescribed print area.

Next, a process for reformatting text and image data with the editor will be described for the case when data read by the editor is determined to be both text and image data according to the process described in Fig. 8. When the combination determining data indicates that data read by the editor is both text and image data, the image data is arranged in the address area corresponding to the area of the image area 158 shown in Fig. 7, while the text data is laid out in the address area corresponding to the text area 159. A first example of this process will be described next with reference to Figs. 22 and 23.

In the present example, the rectangular print area on one page of the tack sheet 13 is divided according to a prescribed occupation ratio into a text area for laying out text data and an image area for laying out image data. Each text data and image data is laid out in corresponding address areas. Although there are several possible layouts, in the example of the present embodiment we will divide the print area in the lengthwise direction of the tack sheet 13 into two rectangular areas. The process for laying out text

data and image data into these areas can be similar to those described in Figs. 9, 10, 14, and 15. In other words, a plurality of text data is laid out in a series in the text area with a line feed code separating each text data and a reformatting process is executed for each. A plurality of the image data, each assigned with a priority, is arranged in the image area. The image data are proportionally enlarged or reduced in order to fit into the unoccupied image area at a maximum size and in the order of priority. As described in Figs. 18-21, it is also possible to arrange each image data in an independent partitioned area at the maximum size possible for feeding in the partitioned area.

As shown in Fig. 23, W is set to the length (number of dots) corresponding to the width of the print area on the tack sheet, while H is set to the length corresponding to the length of one page of the tack sheet 13. In addition, X is set to the width and Y is set to the length of the image area. In other words, the occupation ratio of the image area is X/W , while the occupation ratio of the text area is $(W-X)/W$. An n number of image data are proportionally enlarged or reduced and laid out in the address area corresponding to this print area (X, Y), while one or more text data are laid out in the address area corresponding to the text area (W-X, Y). Let us say that the original size of the nth image data as displayed in the browser is (xn,

yn) and the size of the proportional image data in the editor window after the same data has been proportionally enlarged or reduced is (x_n', y_n') . By setting the top left point in the image area to the reference point, we can set B
5 as the distance of the image in the Y direction on the display 132 when the proportional image data occupies the entire width X, and A as the distance of the image in the X direction on the display 132 when the proportional image data occupies the entire length Y.

10 In Step P0 of Fig. 22, the print area for one page of the tack sheet 13 is divided along the lengthwise direction of the tack sheet 13 using an occupation ratio R and the width X of the image area is found by the expression $X = (R/100) * W$. Steps P1-P8 executed after Step P0 are
15 essentially the same as Steps E1-E8 described for Fig. 14. Therefore, a description of these steps will be omitted here.

In Step P9, it is determined whether the variable A is equal to X ($A = X$) or the variable B is equal to Y ($B = Y$). If one of these two conditions is met (Yes in P9), then this
20 indicates that the print area on one page is filled with image data, and the process jumps to Step P11. In Step P11, the text data is laid out in the text area and the process continues to Step P12. The process for laying out text data is the same as that described above for Fig. 9. Therefore,
25 a description of this process will be omitted here. In

order to simplify the description of this process, we will assume here that the text data does not exceed the text area for one page.

However, if neither of the above two conditions is met
5 (No in P9), then this indicates that the print area for one page still has some blank space and the process continues to Step P10. In Step P10, it is determined whether there is another image data. If another image data exists (Yes in P10), then in Step P13 the parameter n is incremented by 1
10 and the process returns to Step P2. If no image data remains (No in P10), then the process continues to Step P14. In Step P14, text data is arranged in the text area. At this time, the text data is arranged in unused spaces in the image area in order to make effective use of the print area
15 and arrange the text data in a compact manner.

In Step P15, it is determined whether the variable A is 0. If the variable A does not equal 0 (No in P15), then this indicates that the current page of the tack sheet 13 will be printed across the entire length of the print area.
20 Therefore, the process jumps to Step P12, in which a cutting position for cutting the tack sheet 13 in the widthwise direction at the height H, that is, the length of one page, is written as part of the print data to a prescribed area of the RAM 136. However, if the variable A equals 0 (Yes in
25 P15), then this indicates that the bottom portion of the

print area on the page includes an area with no printing and the process continues to Step P16. In Step P16, it is determined whether the variable B is greater than the height of the text data (with the distance from the position of the first line to the position of the last line), in other words, whether the image data extends lower than the text data. If the variable B is greater than the height of the text data (Yes in P16), then the process continues to Step P17. In Step P17, a cutting position for cutting the tack sheet 13 in the widthwise direction at the position B is written as a part of the print data to a prescribed area of the RAM 136. However, if the variable B is not greater than the height of the text data (No in P16), then the process jumps to Step P18. In Step P18, a cutting position for cutting the tack sheet 13 in the widthwise direction at the height of the text data is written as a part of the print data to a prescribed area of the RAM 136.

With this process, it is possible to arrange image and text data automatically in address areas corresponding to the print areas and to achieve a compact and well-organized display without requiring complex editing processes.

Next, a second example of a process for reformatting both text and image data will be described with reference to Figs. 24 and 25. In this example, one page of the tack sheet 13 is divided into a text area and an image area

according to a prescribed occupation ratio and data are laid out in their corresponding areas according to a method similar to that described in the first example. However, one page of the tack sheet 13 is treated as an area elongated in the horizontal direction rather than in the vertical direction, as in the first example. Therefore, in the first example, image data that is longer in the vertical direction can be displayed relatively large in the layout, while image data longer in the horizontal direction is displayed relatively smaller. In the second example, however, image data elongated in the horizontal direction is displayed relatively larger.

As shown in Fig. 25, n selected image data of a rectangular shape and text data are arranged in the address areas corresponding to the image area and text area, formed by dividing the rectangular print area on one page of the tack sheet 13 at a prescribed occupation ratio. Here, the tack sheet 13 is rotated 90 degrees from that shown in Fig. 23 in order that the height H side corresponding to the length of one page of the tack sheet 13 in Fig. 23 is rotated to the top side of the image. The priority for arranging these n image data in this example is set according to size or the like and written to a prescribed area of the RAM 136. Based on the order written to the RAM 136, proportional image data is arranged at a maximum size

and in a common layout direction inside the address area corresponding to an unoccupied portion of the print area.

In Step Q0 of Fig. 24, the print area for one page of the tack sheet 13 is divided along the widthwise direction of the tack sheet 13 using the occupation ratio R, and the width Y of the print area is found by the expression $Y = (R/100)*H$. Steps Q1-Q8 executed after Step Q0 are essentially the same as Steps F1-F8 described for Fig. 16. Therefore, a description of these steps will be omitted here.

In Step Q9, it is determined whether the variable A is equal to X ($A = X$) or the variable B is equal to Y ($B = Y$). If one of these two conditions is met (Yes in Q9), then this indicates that the print area on one page is filled with image data, and the process jumps to Step Q11. In Step Q11, the text data is laid out in the text area and the process continues to Step Q12. The process for laying out text data is the same as that described above for Fig. 9. Therefore, a description of this process will be omitted here. In order to simplify the description of this process, we will assume here that the text data does not exceed the text area for one page.

However, if neither of the above two conditions is met (No in Q9), then this indicates that the print area for one page still has some blank space and the process continues to Step Q10. In Step Q10, it is determined whether there is

another image data. If another image data exists (Yes in Q10), then in Step Q13 the parameter n is incremented by 1 and the process returns to Step Q2. If no image data remains (No in Q10), then the process continues to Step Q14.

5 In Step Q14, text data is arranged in the text area. At this time, the text data is arranged in unused spaces in the image area in order to make effective use of the print area and arrange the text data in a compact manner.

In Step Q15, it is determined whether the variable B is 0. If the variable B does not equal 0 (No in Q15), then this indicates that the current page of the tack sheet 13 will be printed across the entire width of the print area. Therefore, the process jumps to Step Q12, in which a cutting position for cutting the tack sheet 13 in the widthwise direction at the height H, that is, the length of one page, is written as part of the print data to a prescribed area of the RAM 136. However, if the variable B equals 0 (Yes in Q15), then this indicates that the bottom portion of the print area on the page includes an area with no printing and the process continues to Step Q16. In Step Q16, it is determined whether the variable A is greater than the height of the text data (the distance from the position of the first line to the position of the last line), in other words, whether the image data extends lower than the text data. If
25 the variable A is greater than the height of the text data

(Yes in Q16), then the process continues to Step Q17. In Step Q17, cutting positions for cutting the tack sheet 13 in the lengthwise and widthwise directions at the position A and at the height H of one page are written as part of the print data to a prescribed area of the RAM 136. However, if the variable A is not greater than the height of the text data (No in Q16), then the process jumps to Step Q18. In Step Q18, cutting positions for cutting the tack sheet 13 in the lengthwise and widthwise directions at the height of the text data and the height H of one page are written as part of the print data to a prescribed area of the RAM 136.

With this process, image data elongated in the horizontal direction is displayed or printed larger than in the first example process.

Next, a third example of a process for reformatting both text and image data will be described with reference to Figs. 26 and 27. In this example, the image area is partitioned into image and text areas according to an initial occupation ratio. Here, the image area is allocated in the upper left corner of the image area with the remainder allocated as the text area. The areas are enlarged according to the size of the data to be arranged therein.

As shown in Fig. 27(a), a rectangular print area having a width W and a height H1 (shorter than the height of

(Yes in Q16), then the process continues to Step Q17. In Step Q17, cutting positions for cutting the tack sheet 13 in the lengthwise and widthwise directions at the position A and at the height H of one page are written as part of the print data to a prescribed area of the RAM 136. However, if
5 the variable A is not greater than the height of the text data (No in Q16), then the process jumps to Step Q18. In Step Q18, cutting positions for cutting the tack sheet 13 in the lengthwise and widthwise directions at the height of the
10 text data and the height H of one page are written as part of the print data to a prescribed area of the RAM 136.

With this process, image data elongated in the horizontal direction is displayed or printed larger than in the first example process.

15 Next, a third example of a process for reformatting both text and image data will be described with reference to Figs. 26 and 27. In this example, the image area is partitioned into image and text areas according to an initial occupation ratio. Here, the image area is allocated
20 in the upper left corner of the image area with the remainder allocated as the text area. The areas are enlarged according to the size of the data to be arranged therein.

As shown in Fig. 27(a), a rectangular print area
25 having a width W and a height H1 (shorter than the height of

one page of the tack sheet 13) is partitioned according to a prescribed occupation ratio into an image area ($X1 \times Y1$) near the upper left corner and a text area in the remaining portion. A number n of selected rectangular image data is arranged in the image area, while text data is arranged in the text area. Any of the methods described above can be used to lay out the text and image data in their respective areas. The image area layout in the print area is not limited to the example shown in Fig. 27(a). It is also possible to position this image area near the upper right corner or in the center of the print area.

In Step R1, image data and text data are read into the editor. In Step R2, the image data is laid out in the image area according to one of the methods described above. In Step R3, the zoom ratio of each image data laid out in the image area is found according to the process described in Steps G61-G65 of Fig. 19. The zoom ratio found here is compared to the minimum reduction percentage set in advance by the user. If the zoom ratio is equal to or greater than the minimum reduction percentage (Yes in R3), then the process continues to Step R5. If the zoom ratio is less than the minimum reduction percentage (No in R3), then the process jumps to Step R4.

In Step R4, the image area is geometrically enlarged in the print area. That is, the vertical and horizontal

lengths of the image area are enlarged by the same proportion. This process can prevent the proportional image data from being reduced so small as to be difficult to see. The result of this geometric enlargement is illustrated by
5 Fig. 27(b), wherein $Y2/X2 = Y1/X1$. Here, the ratio for enlarging the image area can be preset to any value by the user. Subsequently, Steps R2 and R3 are repeated for the enlarged image area.

10 In Step R5, it is determined whether lines of text in an overhanging text area contain a prescribed number or more of characters when displayed at a prescribed point size. The overhanging text area is defined as the narrow text area on the left or right side of the image area (the position adjacent to the text data in the direction of the character
15 arrays). This is designed to prevent lines of text displayed in the overhanging text area from having too few characters that can make the text difficult to read.

If the number of characters in lines of text in the overhanging text area is equal to or greater than the
20 prescribed number (Yes in R5), then the process continues to Step R6, where the text data is laid out according to a fill in layout for arranging text in the overhanging text area. However, if the number of characters in lines of text in the overhanging text area is less than the prescribed number (No
25 in R5), then the process jumps to Step R7, where text data

is not laid out in the overhanging text area but is laid out according to a separating layout.

In Step R8, text data is laid out in the text area according to either the fill in layout or the separating layout determined in Step R6 or Step R7. Text data can be laid out according to one of the methods described above. In Step R9, it is determined whether the text data fits into the text area when displayed at a prescribed point size.

If the text data does fit in the text area (Yes in R9), then the data layout process of the present example ends. However, if the text data does not fit in the text area (No in R9), then the length of the text area is expanded by enlarging the height of the print area, without changing the image area. For example, if the fill in layout is employed, then the height of the print area is set to H2, as shown in Fig. 27(c), where $H2 > H1$. If the separating layout is employed, then the height of the print area can be set to H3, as shown in Fig. 27(d), where $H3 > H2$. With this method, text data can be suitably displayed without affecting the image display.

With the process described above, both image data and text data can be laid out without excessively reducing the data as to be difficult to see.

According to the embodiments described above, the user can display and print images and text in a well-organized

manner by performing simple operations to specify the text and image data in a browser or word processing program. This process can be used to create labels having a size suitable for being pasted in a notebook or the like. By
5 printing only the necessary data on such a label, it is possible to prevent wasteful use of the tack sheets and enable the user to carry a lighter load of only essential data that can be referenced at any time.

In the embodiment described above, the present
10 invention was applied to the example of printing tack sheets. However the present invention is not limited to this application, but can also be applied to general text and image data processing. Further, the data processor of the present invention is configured by a personal computer in
15 the embodiment described above. However, the data processor of the present invention can be configured by a cutting printer only or both a cutting printer and a personal computer.

Although the above-described embodiment is applied to
20 a small-size label producing apparatus, it can also be applied to a printer that is capable of printing on a cloth fabric or the like, an embroidery machine that stitches an embroidery on a cloth fabric, a device for forming a print surface of a stamp, or a monitor of a handy terminal such as
25 a handy phone or PDA.

WHAT IS CLAIMED IS:

1. A data processing device comprising:

individual data identifying means for identifying that
each piece of data in a block of data containing one or
5 plural pieces of data is text data or image data, and
providing an individual data identifying result;

determining means for determining, based on the
individual data identifying result, whether the block of
data includes only the text data, only the image data or
10 both the text data and the image data, and providing
determination result;

layout means for laying out the one or plural pieces
of data according to a layout pattern that differs depending
upon the determination result.

15 2. The data processing device according to claim 1,
further comprising:

control means for controlling a printing section to
print the one or plural pieces of data on an elongated, web-
like substrate having a width according to the layout
20 pattern, controlling a cutting section to cut the substrate
along the width each time the substrate is printed a
predetermined length, and further controlling the cutting
section to cut, when printing of the one or plural pieces of
data has finished, the substrate along a line between a
25 printed region and a non-printed region of the substrate.

3. The data processing device according to claim 1,
further comprising:

line feed code detecting means for detecting, when
determination made by said determining means indicates that
5 the one or plural pieces of data includes only the text data,
a line feed code that may exist in the text data;

prescribed code detecting means for detecting a
prescribed code that may exist immediately before or after
the line feed code detected by said line feed code detecting
10 means; and

line feed code deletion means for deleting, when
detection made by said prescribed code detecting means
indicates that the prescribed code is not detected, the line
feed code detected by said line feed code detecting means.

4. The data processing device according to claim 1,
further comprising:

space character code detecting means for detecting,
when determination made by said determining mean indicates
that the one or plural pieces of data include only the text
20 data, a space character code that may exist in the text
data;

count value control means for controlling a space
counter to increment a count value of the space counter by
one each time when the space character code is consecutively
25 detected from the text data, and initialize the count value

of the space counter to zero when a code other than the space character code is detected by said space character code detecting means;

count value determining means for determining, when the
5 space character code is not detected from the text data, that the count value of the space counter is equal to or greater than two indicating that two or more than two space character codes consecutively exist in the text data; and

space character code deleting means for deleting the
10 two or more than two space character codes when determination made by said count value determining means indicates that the count value of the space counter is equal to or greater than two.

5. The data processing device according to claim 1,
15 further comprising:

space character detecting means for detecting that only one space character exists at a head of a first line of the text data when determination made by said determining means indicates that the one or plural pieces of data
20 include only the text data; and

space character deletion means for deleting the one space character when determination made by said space character detecting means indicates that a space character exists at the head of the first line of the text data.

25 6. The data processing device according to claim 1,

further comprising:

arranging order setting means for setting, when
determination made by said determining means indicates that
the one or plural pieces of data includes only the image
5 data, an order in which the one or plural pieces of data are
arranged on a layout area; and

proportional image data producing means for producing
a proportionally enlarged or proportionally reduced image
data so that each piece of data is proportionally enlarged
10 or proportionally reduced to a maximum size that fits within
an unoccupied layout area, the proportionally enlarged or
proportionally reduced image data being produced in the
order in which the one or plural pieces of data are arranged
on the layout area.

15 7. The data processing device according to claim 6,
wherein said layout means arranges arranging in an
orientation relative to the layout area, the proportionally
enlarged or proportionally reduced image data on the layout
area in the order set by said arranging order setting means.

20 8. The data processing device according to claim 7,
further comprising divided layout area setting means for
dividing the layout area into a predetermined number of
partitioned areas, wherein said proportional image data
producing means produces the proportionally enlarged or
25 proportionally reduced image data so that each piece of data

is proportionally enlarged or proportionally reduced to a maximum size that fits within a designated one of the predetermined number of partitioned areas when the proportionally enlarged or proportionally reduced image data is arranged in an orientation relative to the layout area.

9. The data processing device according to claim 1, further comprising area dividing means for dividing, when determination made by said determination means indicates that the one or plural pieces of data includes the text data and the image data, the layout area into a text area for laying out the text data and an image area for laying out the image data according to a predetermined ratio, wherein said layout means comprises image layout means for laying out one or more image data, each of the one or more image data having been enlarged or reduced by the same proportion, into the image area; and text layout means for laying out one or more text data in the text area.

10. A data processing device comprising:

line feed code/space character detecting means for detecting a line feed code and a space character which may exist in text data;

prescribed code detecting means for detecting a prescribed code that may exist immediately before or after the line feed code detected by said line feed code/space character detecting means;

line feed code deletion means for deleting, when detection made by said prescribed code detecting means indicates that the prescribed code is not detected, the line feed code detected by said line feed code detecting means;

5 a space counter that is incremented by one each time when said line feed code/space character detecting means consecutively detects the space character and is initialized to zero when a code other than the space character code is detected by said line feed code/space character detecting
10 means;

count value determining means for determining, when the code other than the space character code is detected by said line feed code/space character detecting means, that a count value of said space counter is equal to or greater
15 than two indicating that two or more than two space character codes consecutively exist in the text data; and

space character code deleting means for deleting the two or more than two space character codes when determination made by said count value determining means
20 indicates that the count value of the space counter is equal to or greater than two.

11. The data processing device according to claim 10, further comprising:

blank line flag storing means for storing a blank line
25 flag representing whether a character other than a space

character exists before a line feed code in one logical line;

blank line flag control means for controlling on/off of the blank line flag in such a manner that when said space counter is initialized, and when said line feed code/space character detecting means detects the line feed code and immediately before said space counter is initialized, the blank line flag is set to on, whereas when said line feed code/space character detecting means detects a code or a character other than the line feed code and the space character and immediately before said space counter is initialized, the blank line flag is set to off; and

space character deletion means for deleting one space character existing at a head of a first line of the text data if the blank line flag is on when determination made by said count value determining means indicates that the value of said space counter is not two or more than two.

12. The data processing device according to claim 10, further comprising space character deletion means for deleting all space characters existing in the logical line if the blank line flag is on when said line feed code/space character detecting means detects the line feed code.

13. A data processing method comprising the steps of:

a) identifying whether a piece of data in a block of data containing one or plural pieces of data is text data or

image data;

b) repeating step a) with respect to each piece of data contained in the block of data;

c) determining whether the one or plural pieces of data as identified in step a) include only the text data, only the image data, or both the text data and the image data; and

d) laying out the one or plural pieces of data according to a layout pattern that differs depending upon the result of determination in step c).

14. The data processing method according to claim 13, further comprising the steps of:

e) controlling a printing section to print the one or plural pieces of data on an elongated, web-like substrate having a width according to the layout pattern, controlling a cutting section to cut the substrate along the width each time the substrate is printed a predetermined length, and further controlling the cutting section to cut, when printing of the one or plural pieces of data has finished, the substrate along a line between a printed region and a non-printed region of the substrate.

15. The data processing method according to claim 13, further comprising the steps of:

f) detecting, when determination made in step c) indicates that the one or plural pieces of data includes

only the text data, a line feed code that may exist in the text data;

g) detecting a prescribed code that may exist immediately before or after the line feed code detected during detection of the line feed code in step f); and

h) deleting, when detection made in step g) indicates that the prescribed code is not detected in step g), the line feed code detected in step f).

16. The data processing method according to claim 13, further comprising the steps of:

i) detecting, when determination made in step c) indicates that the one or plural pieces of data include only the text data, a space character code that may exist in the text data;

j) incrementing a count value of a space counter by one each time when the space character code is consecutively detected from the text data, and initializing the count value of the space counter to zero when a code other than the space character code is detected in step i);

k) determining, when the space character code is not detected from the text data, that the count value of the space counter is equal to or greater than two indicating that two or more than two space character codes consecutively exist in the text data; and

l) deleting the two or more than two space character

codes when determination made in step k) indicates that the count value of the space counter is equal to or greater than two.

17. The data processing method according to claim 13,
5 further comprising the steps of:

m) detecting that only one space character exists at a head of a first line of the text data when determination made in step c) indicates that the one or plural pieces of data include only the text data; and

10 n) deleting the one space character when determination made in step m) indicates that a space character exists at the head of the first line of the text data.

18. The data processing method according to claim 13, further comprising the steps of:

15 o) setting, when determination made in step c) indicates that the one or plural pieces of data includes only the image data, an order in which the one or plural pieces of data are arranged on a layout area; and

p) producing a proportionally enlarged or
20 proportionally reduced image data so that each piece of data is proportionally enlarged or proportionally reduced to a maximum size that fits within an unoccupied layout area, the proportionally enlarged or proportionally reduced image data being produced in the order in which the one or plural
25 pieces of data are arranged on the layout area.

19. The data processing method according to claim 18, wherein in step d), the proportionally enlarged or proportionally reduced image data are laid out in an orientation on the layout area in the order set in step c).

5 20. The data processing method according to claim 19, further comprising the step of q) determining the orientation in which the proportionally enlarged or proportionally reduced image data are laid out on the layout area so that a firstly produced image data has a size that
10 fits within the layout area.

21. The data processing method according to claim 18, further comprising the step of r) dividing the layout area into a predetermined number of partitioned areas, wherein the proportionally enlarged or proportionally reduced image
15 data are produced so that each piece of data is proportionally enlarged or proportionally reduced to a maximum size that fits within a designated one of the predetermined number of partitioned areas when the proportionally enlarged or proportionally reduced image data
20 is arranged in the orientation.

22. The data processing method according to claim 13, further comprising the step of s) dividing, when determination made in step c) indicates that the one or plural pieces of data includes the text data and the image
25 data, the layout area into a text area for laying out the

text data and an image area for laying out the image data according to a predetermined ratio. and wherein said step d) comprises d1) laying out one or more image data, each of the one or more image data having been enlarged or reduced by the same proportion, into the image area; and d2) laying out one or more text data in the text area.

23. A data processing program comprising:

an identification program for identifying whether a piece of data in a block of data containing one or plural pieces of data is text data or image data;

a repeat program for repeatedly executing said identification program with respect to each piece of data contained in the block of data;

a determination program for determining whether the one or plural pieces of data as identified through the execution of said repeat program include only the text data, only the image data, or both the text data and the image data, and providing a determination result; and

a layout program for executing layout of the one or plural pieces of data according to a layout pattern that differs depending upon the determination result.

24. The data processing program according to claim 23. further comprising:

a print program for instructing to print the one or plural pieces of data on an elongated, web-like substrate

having a width according to the layout pattern used in said layout program,;

a first cut program for instructing to cut the substrate along the width each time the substrate is printed
5 a predetermined length; and

a second cut program for instructing, when printing of the one or plural pieces of data has finished, to cut the substrate along a line between a printed region and a non-printed region of the substrate.

10 25. The data processing program according to claim 23, wherein identification executed by said identification program is made based on a format identifier attendant to each piece of data.

15 26. The data processing program according to claim 23, further comprising:

a line feed code detection program for detecting, when determination made by said determination program indicates that the one or plural pieces of data includes only the text data, a line feed code that may exist in the text data;

20 a prescribed code detection program for detecting a prescribed code that may exist immediately before or after the line feed code detected during detection of the line feed code by said line feed code detection program; and

a line feed code deletion program for deleting, when
25 detection made by said prescribed code detection program

indicates that the prescribed code is not detected through
detection of the prescribed code by said prescribed code
detection program, the line feed code detected through
detection of the line feed code by said line feed code
5 detection program.

27. The data processing program according to claim 26,
wherein the prescribed code includes a punctuation code
representative of a punctuation mark, a delimiting code
representative of a period, comma, colon, or semicolon, and
10 itemization code designed for using at a head of each line
of a printed document in an itemization.

28. The data processing program according to claim 23,
further comprising:

a space character code detection program for detecting,
15 when determination made by said determination program
indicates that the one or plural pieces of data include only
the text data, a space character code that may exist in the
text data;

a space counter control program for incrementing a
20 count value of a space counter by one each time when the
space character code is consecutively detected from the text
data, and initializing the count value of the space counter
to zero when a code other than the space character code is
detected during detection the space character code by said
25 space character code detection program;

a space code number determination program for determining, when the space character code is not detected from the text data, that the count value of the space counter is equal to or greater than two indicating that two or more than two space character codes consecutively exist in the text data; and

a space code deletion program for deleting the two or more than two space character codes when determination made in said space code number determination program indicates that the count value of the space counter is equal to or greater than two.

29. The data processing program according to claim 23,
further comprising:

15 a space character detection program for detecting that only one space character exists at a head of a first line of the text data when determination made by said determination program indicates that the one or plural pieces of data includes only the text data; and

a space character deletion program for deleting the
one space character when determination made in said space
character detection program indicates that a space character
exists at the head of the first line of the text data.

30. The data processing program according to claim 23,
further comprising:

25 an arranging order setting program for setting, when

determination made by said determination program indicates that the one or plural pieces of data includes only the image data, an order in which the one or plural pieces of data are arranged on a layout area; and

5 a proportional image data producing program for producing a proportionally enlarged or proportionally reduced image data so that each piece of data is proportionally enlarged or proportionally reduced to a maximum size that fits within an unoccupied layout area, the
10 proportionally enlarged or proportionally reduced image data being produced in the order in which the one or plural pieces of data are arranged on the layout area.

31. The data processing program according to claim 30, wherein said layout program executes arranging in an
15 orientation relative to the layout area, the proportionally enlarged or proportionally reduced image data on the layout area in the order set by said arranging order set program.

32. The data processing program according to claim 31, further comprising a layout orientation determining program
20 for determining the orientation in which the proportionally enlarged or proportionally reduced image data are arranged on the layout area so that a firstly produced image data has a size that fits within the layout area.

33. The data processing program according to claim 30,
25 further comprising a divided layout area setting program for

dividing the layout area into a predetermined number of partitioned areas, and wherein said proportional image data producing program produces the proportionally enlarged or proportionally reduced image data so that each piece of data is proportionally enlarged or proportionally reduced to a maximum size that fits within a designated one of the predetermined number of partitioned areas when the proportionally enlarged or proportionally reduced image data is arranged in an orientation relative to the layout area.

34. The data processing program according to claim 33, further comprising a comparison program for comparing an enlargement/reduction ratio of the proportionally enlarged or proportionally reduced image data with a predetermined minimum reduction ratio.

35. The data processing program according to claim 34, wherein said layout program executes arranging the proportionally reduced image data over two or more partitioned areas upon dividing the proportionally reduced image data into a corresponding number when comparison executed by said comparison program indicates that the enlargement/reduction ratio of the proportionally reduced image data is smaller than the predetermined minimum reduction ratio.

36. The data processing program according to claim 35, further comprising a warning issuing program for issuing a

warning to notify a user that the enlargement/reduction ratio of the proportionally reduced image data arranged over the two or more partitioned areas is smaller than the predetermined minimum reduction ratio.

5 37. The data processing program according to claim 23, further comprising an area dividing program for dividing, when determination made by said determination program indicates that the one or plural pieces of data includes the text data and the image data, the layout area into a text
10 area for laying out the text data and an image area for laying out the image data according to a predetermined ratio, and wherein said layout program comprises an image layout program for laying out one or more image data, each of the
15 one or more image data having been enlarged or reduced by the same proportion, into the image area; and a text layout program for laying out one or more text data in the text area.

 38. The data processing program according to claim 37, wherein said text layout program executes arranging the text
20 data in portions of the image area not occupied by image data.

 39. The data processing program according to claim 38, wherein the predetermined ratio for dividing the layout area into the text area and the image area is variable.

25 40. The data processing program according to claim 39,

4

5

further comprising a comparison program for comparing an enlargement/reduction ratio of the proportionally enlarged or proportionally reduced image data with a predetermined minimum reduction ratio, wherein the predetermined ratio is

5 changed to increase the image area when comparison executed by said comparison program indicates that the enlargement/reduction ratio of the proportionally reduced image data is smaller than the predetermined minimum reduction ratio.

10

ABSTRACT OF THE DISCLOSURE

In a data processing, a print area is divided into a text area for arranging text data and an image area for arranging image data. The image data is proportionally
5 modified before arranging the data in the image area. Also, the text data is reformatted by, for example, deleting unnecessary line feed codes before arranging the data in the text area.

006250" E02/950

FIG. 1

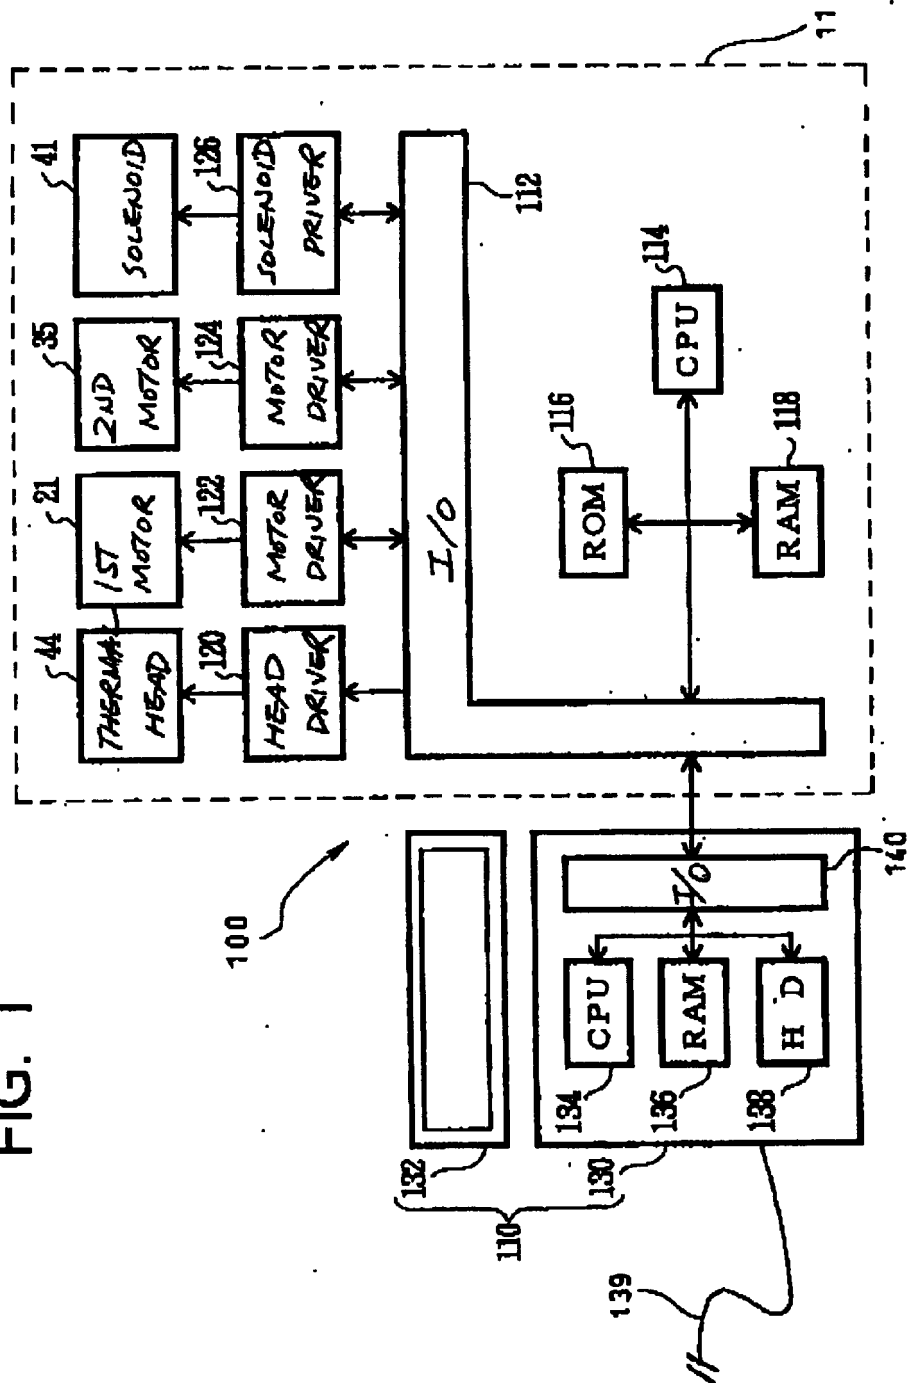


FIG. 2

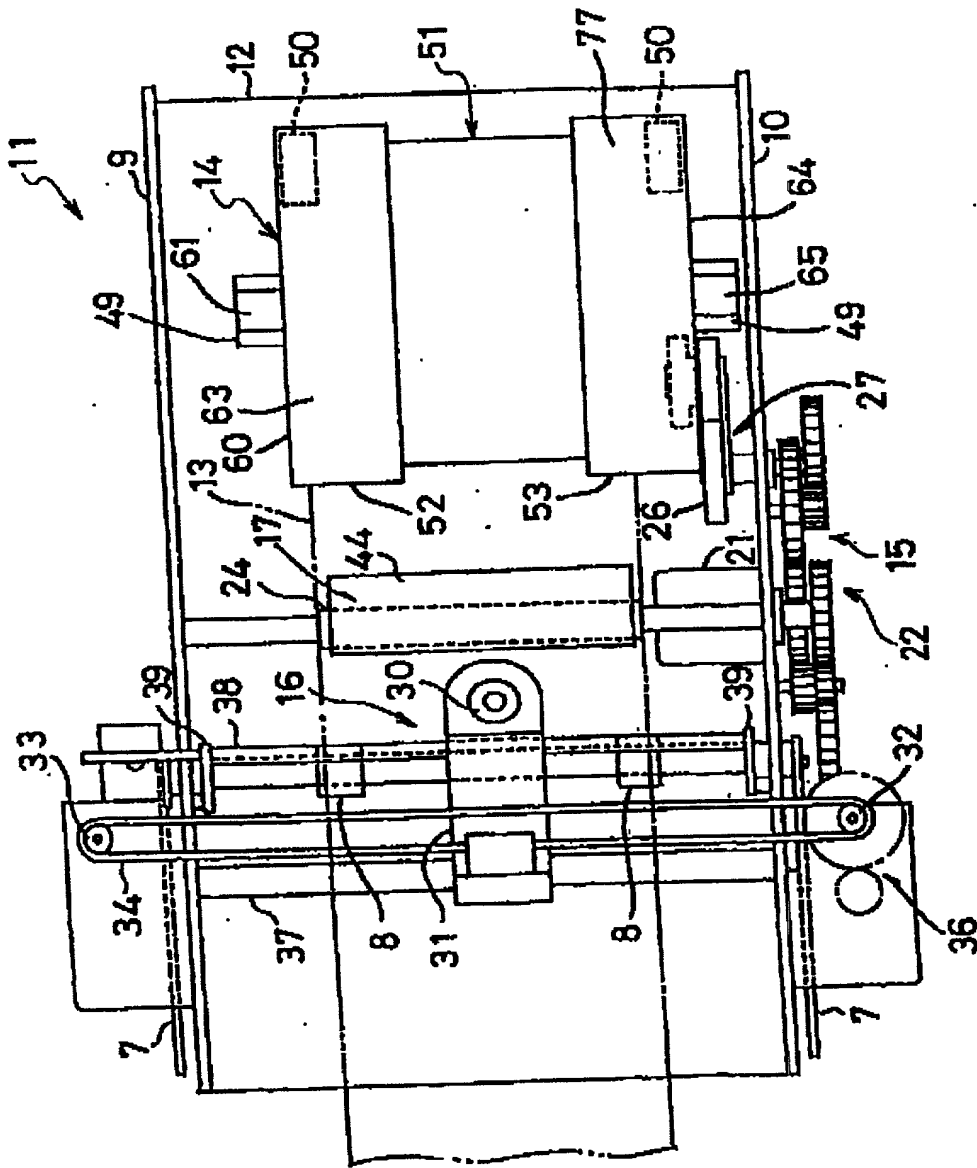


FIG. 3

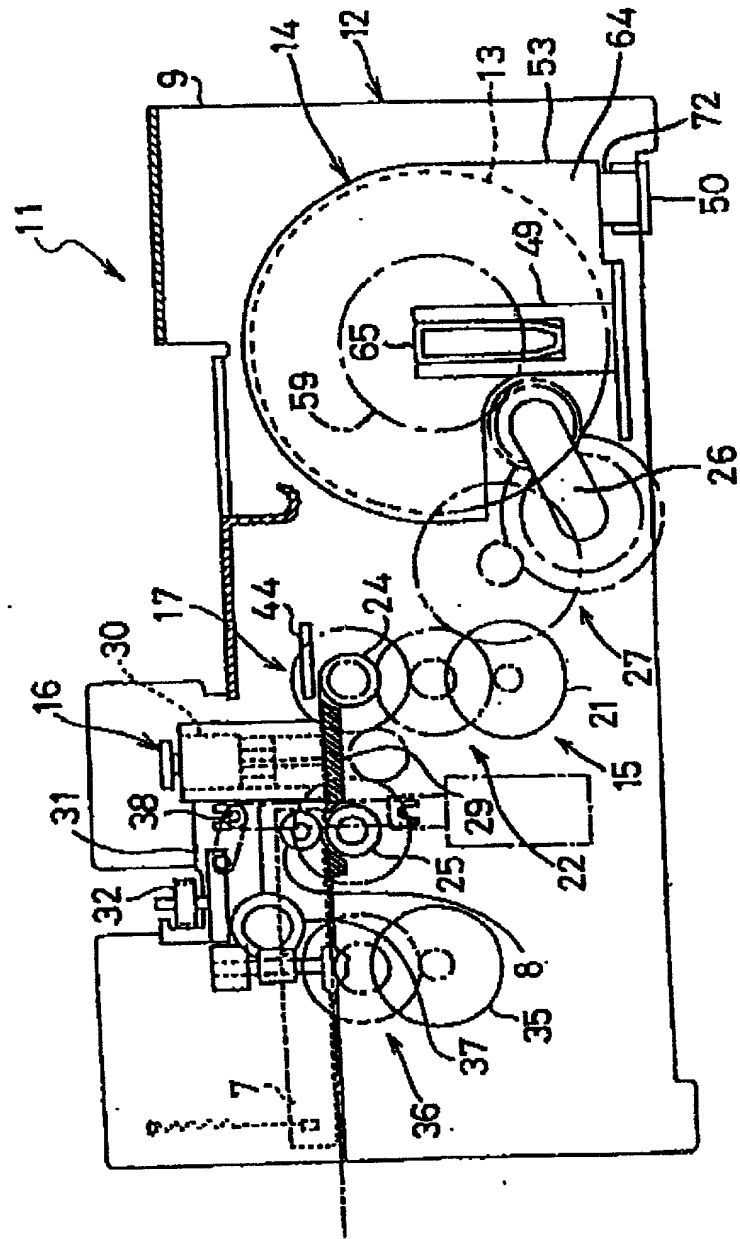


FIG. 4

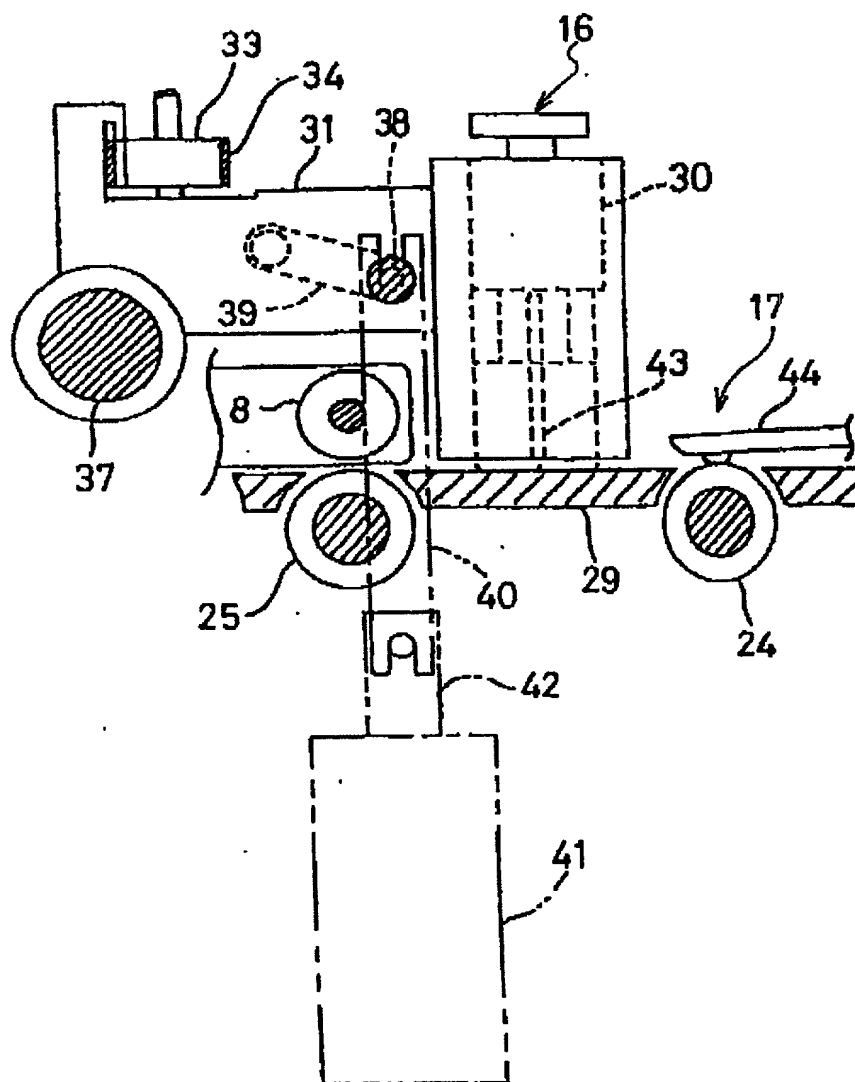


FIG. 5

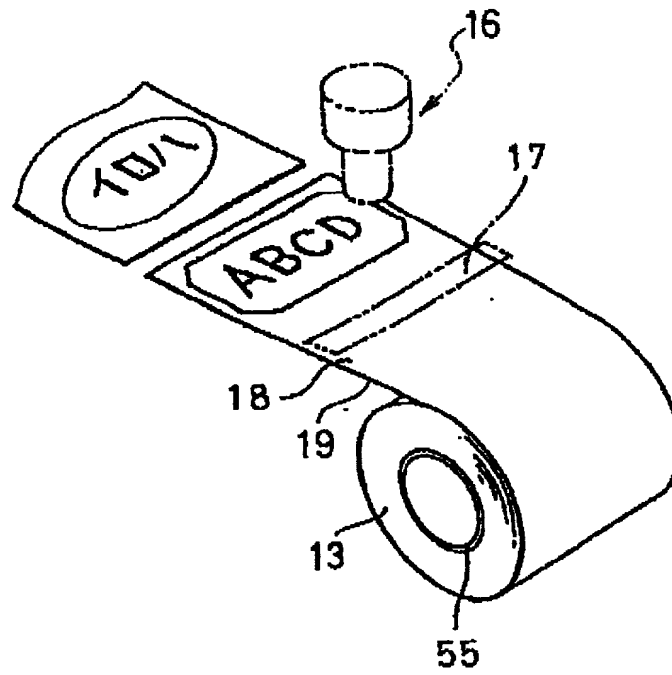


FIG. 6

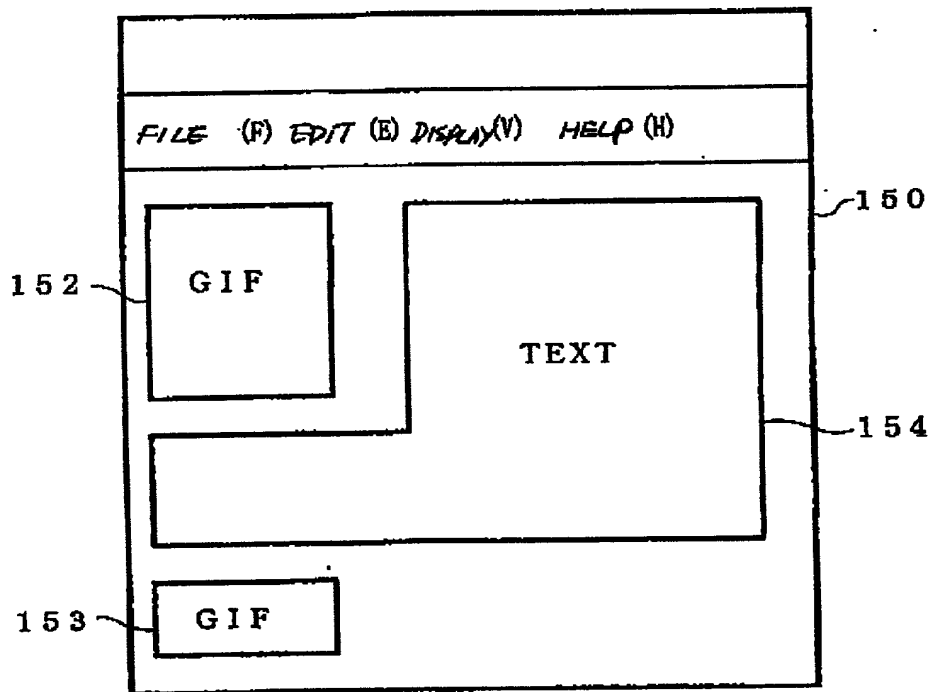


FIG. 7

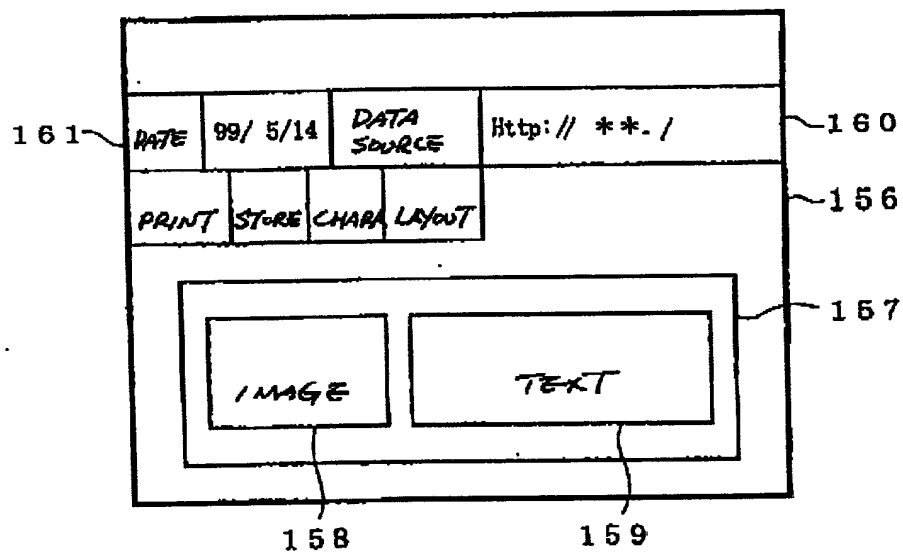


FIG. 8

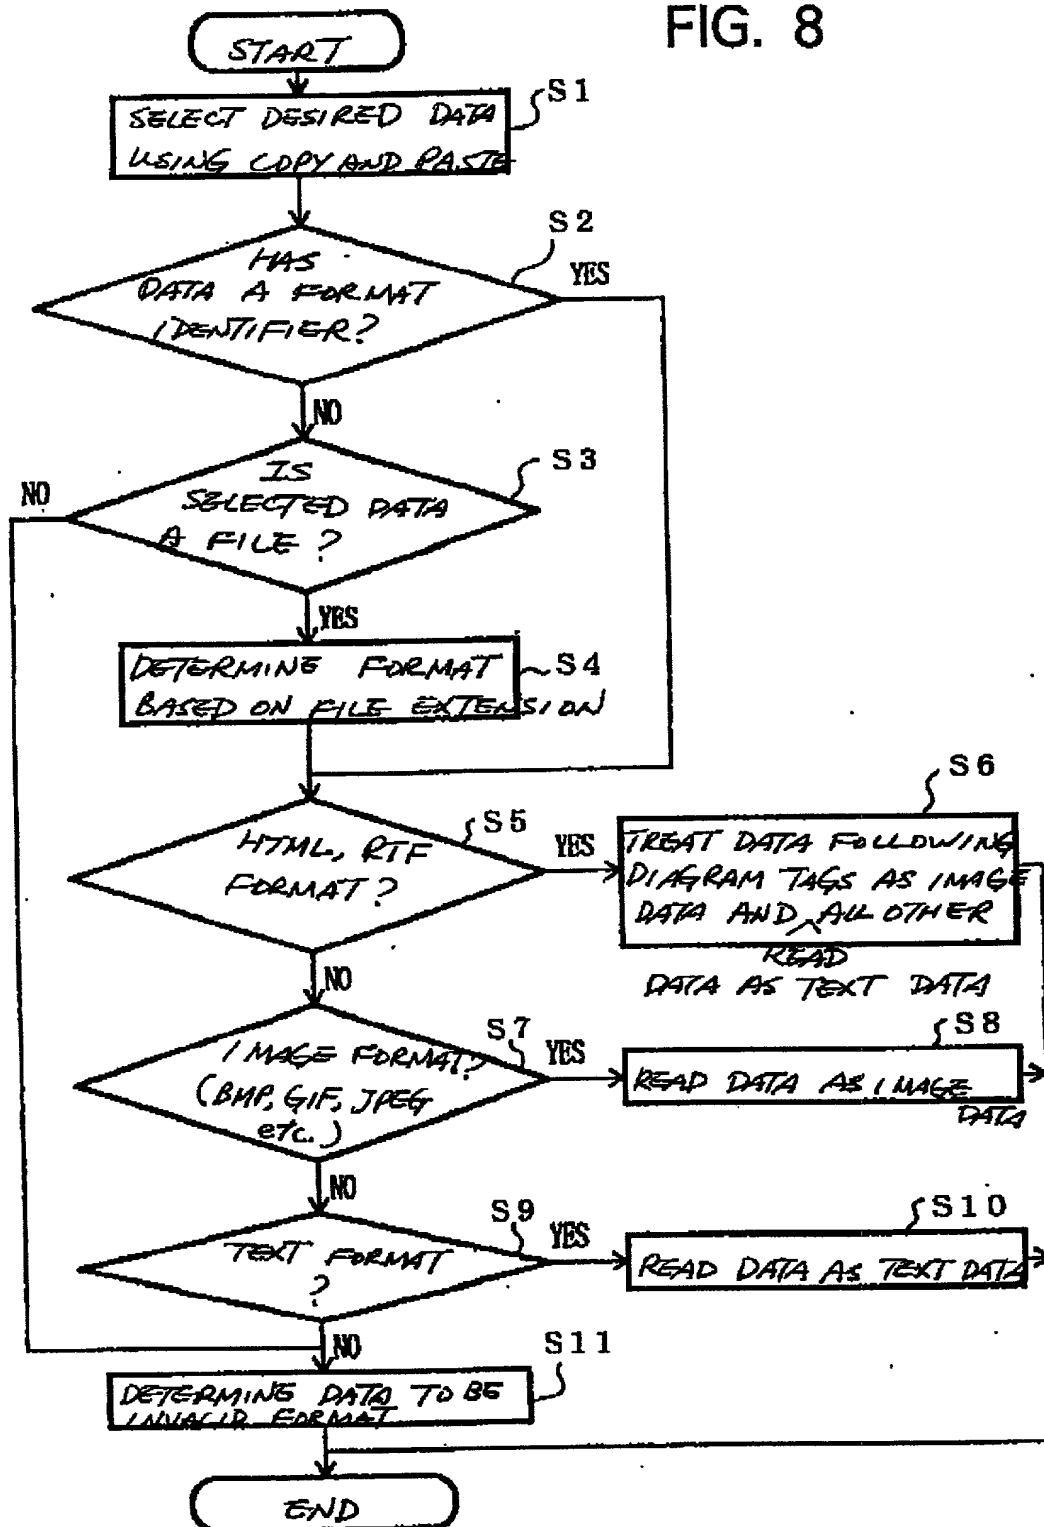


FIG. 9

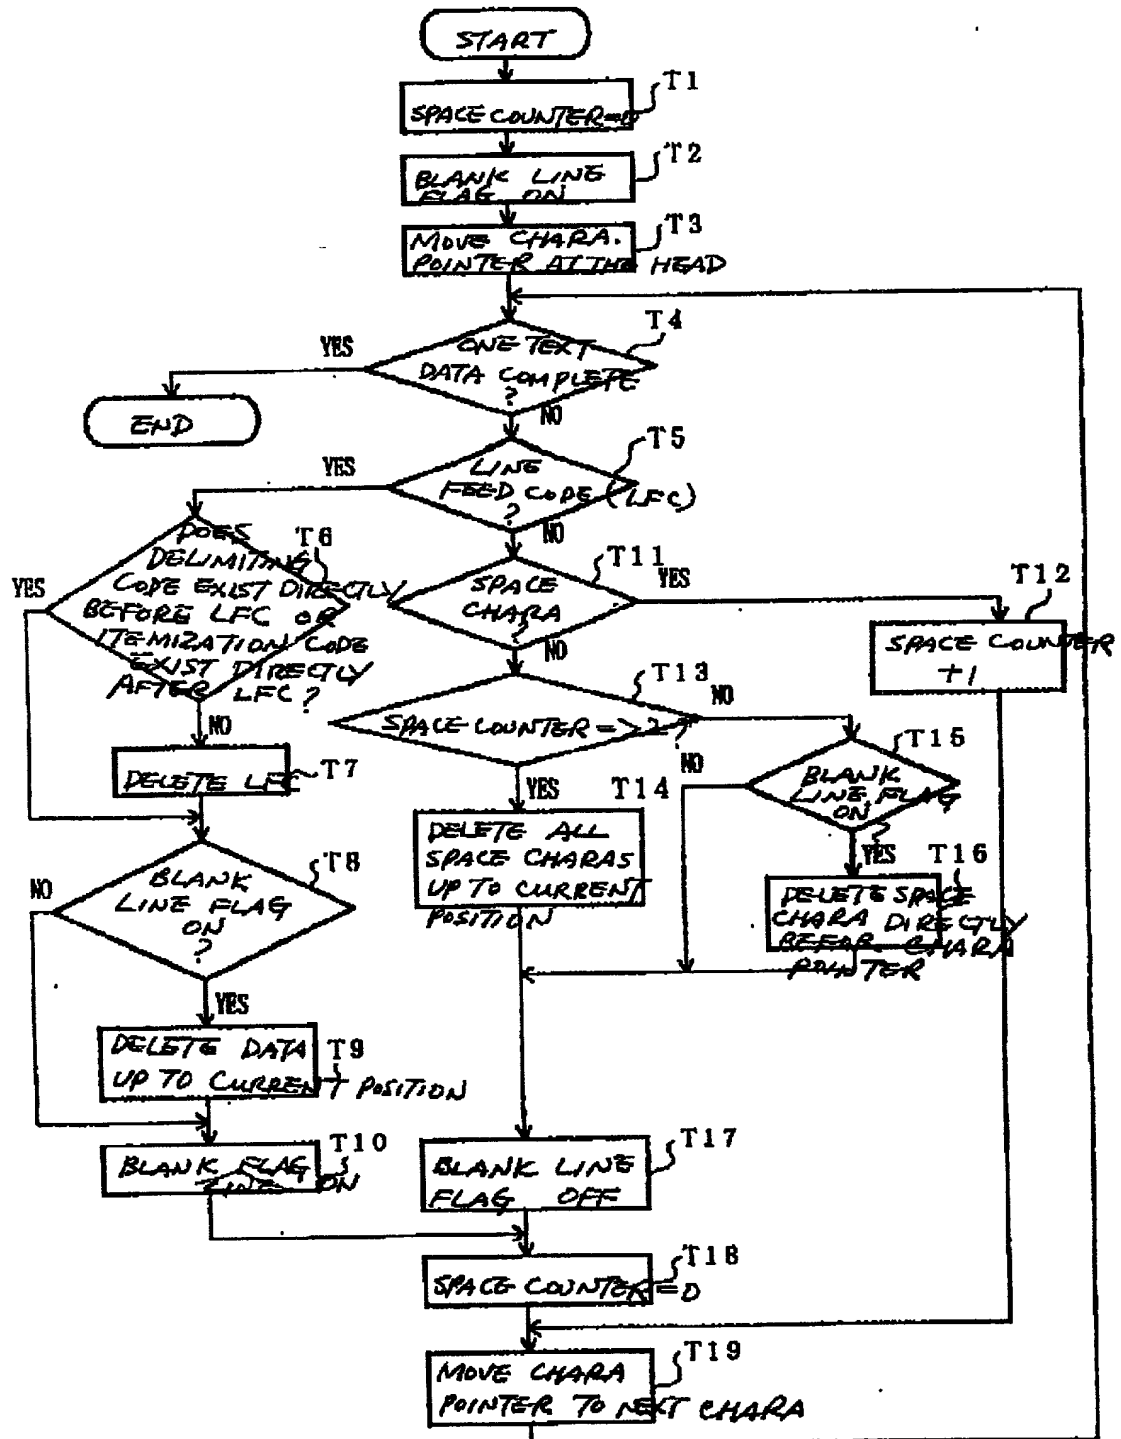


FIG. 10

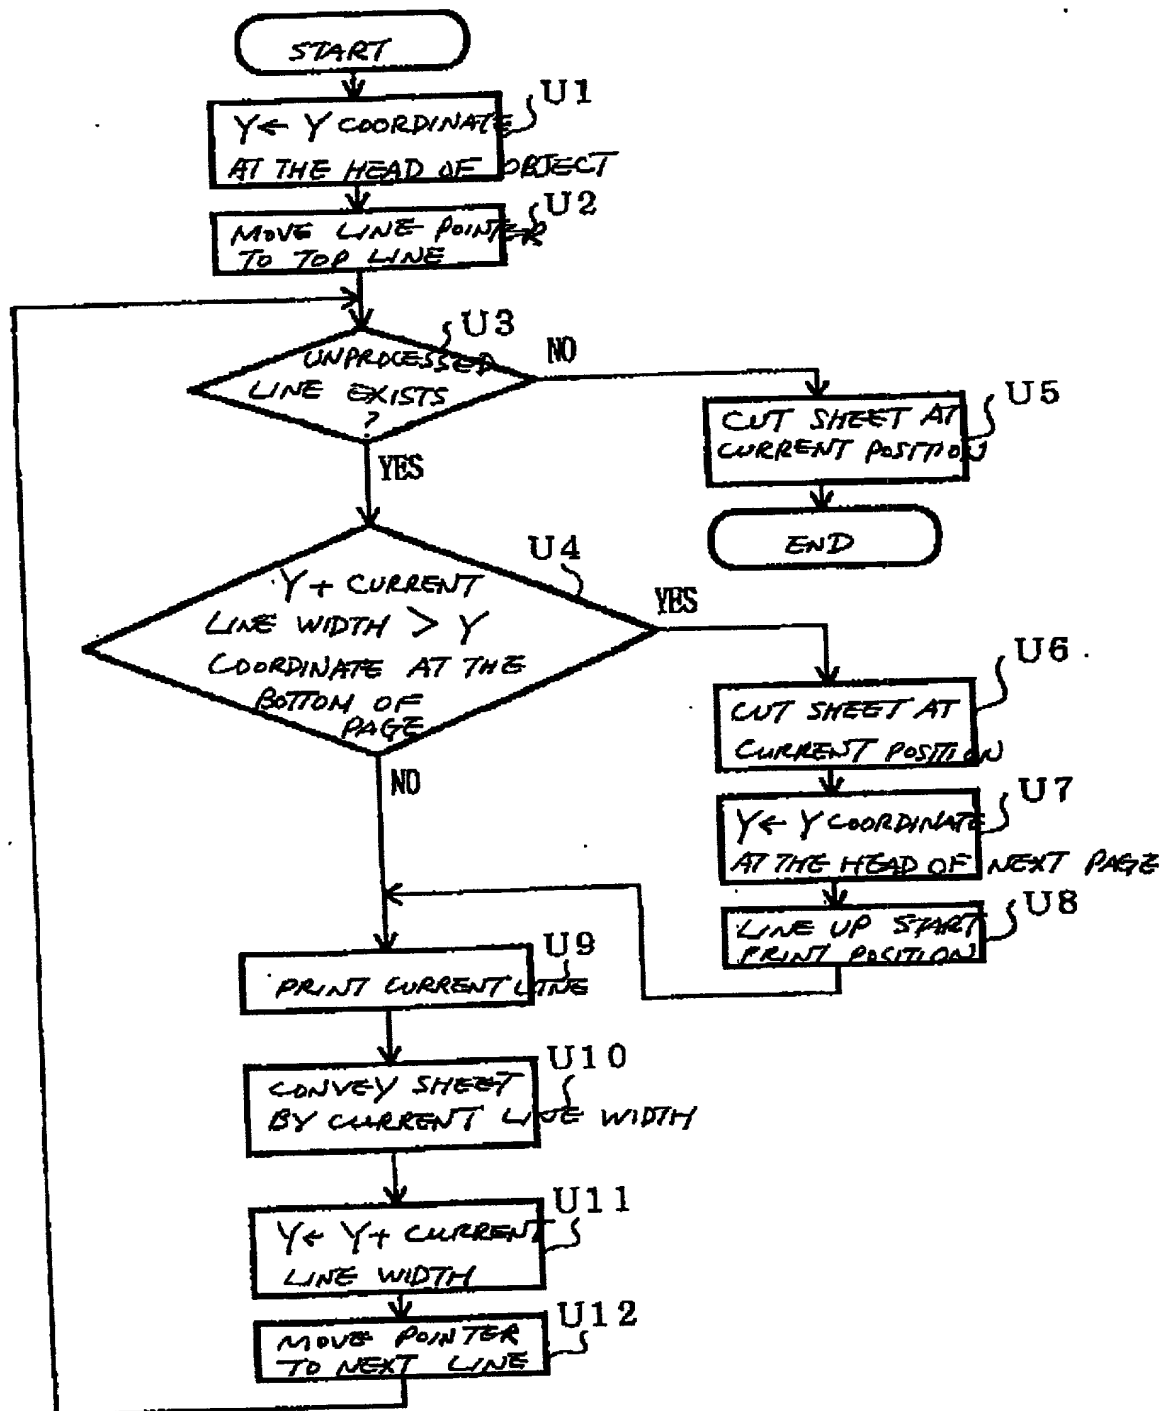


FIG. 11

1行目と2行目は連続した行なので、途中の改↓
行コードは削除されます。↓

連続した行で、なおかつインデントした↓
行に関しては、行をつなげた場合に先頭に↓
あったスペースが残ってしまうとみつと↓
もないので、削除する。↓

↓

改行コードが削除されないのは…、↓

- ・箇条書き記号「・」などが先頭にある。↓
- ・改行コードの直前に句点「。」がある。↓

の条件を満たす場合である。↓

FIG. 12

1行目と2行目は連続した行
なので、途中の改↓
行コードは削除されます。↓

連続した行で、なおかつ
インデントした↓
行に関しては、行をつなげ
た場合に先頭に↓
あったスペースが残って
しまうとみつと↓
もないので、削除する。↓

↓

改行コードが削除されないの
は…、↓

- ・箇条書き記号「・」などが先頭
にある。↓
- ・改行コードの直前に句点「。」
がある。↓

の条件を満たす場合である。↓

FIG. 13

1行目と2行目は連続した行なので、途中の改行コードは削除されます。↓
連続した行で、なおかつインデントした行に関しては、行をつなげた場合に先頭にあったスペースが残ってしまうとみっともないので削除する。↓
改行コードが削除されないのは...、↓
・箇条書き記号「・」などが先頭にある。↓
・改行コードの直前に句点「。」がある。↓
の条件を満たす場合である。↓

FIG. 14

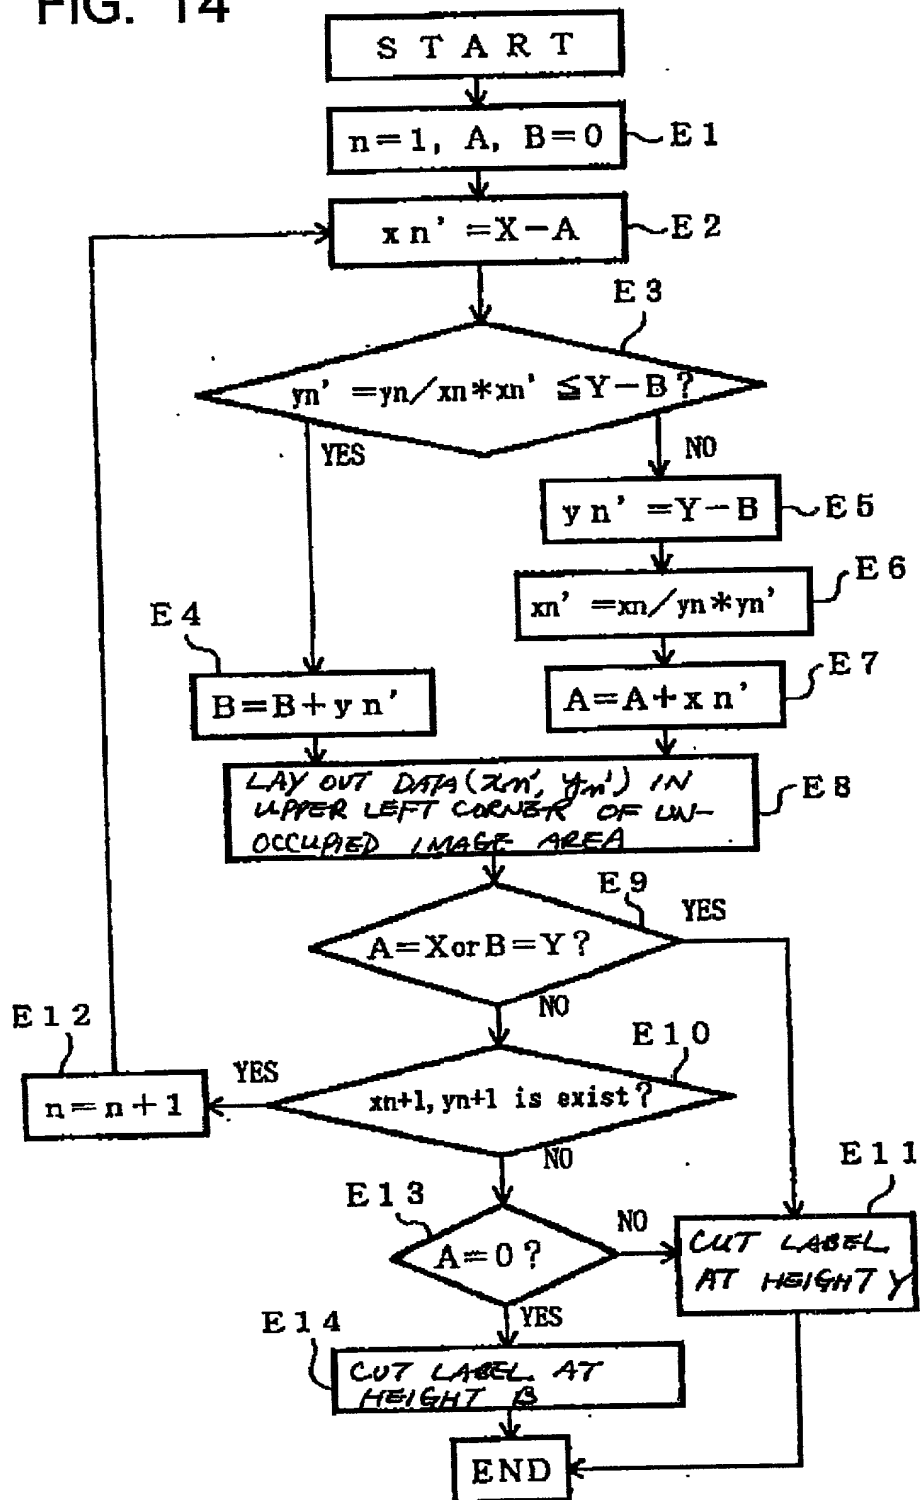


FIG. 15

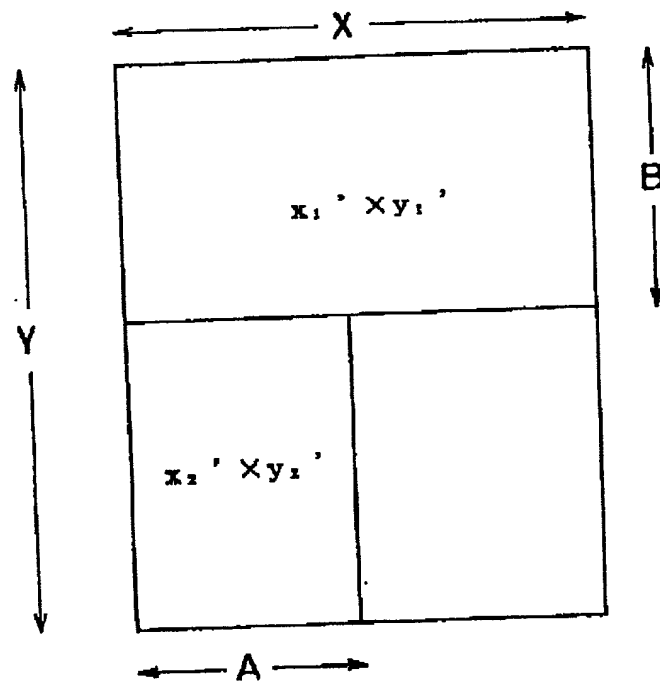


FIG. 16

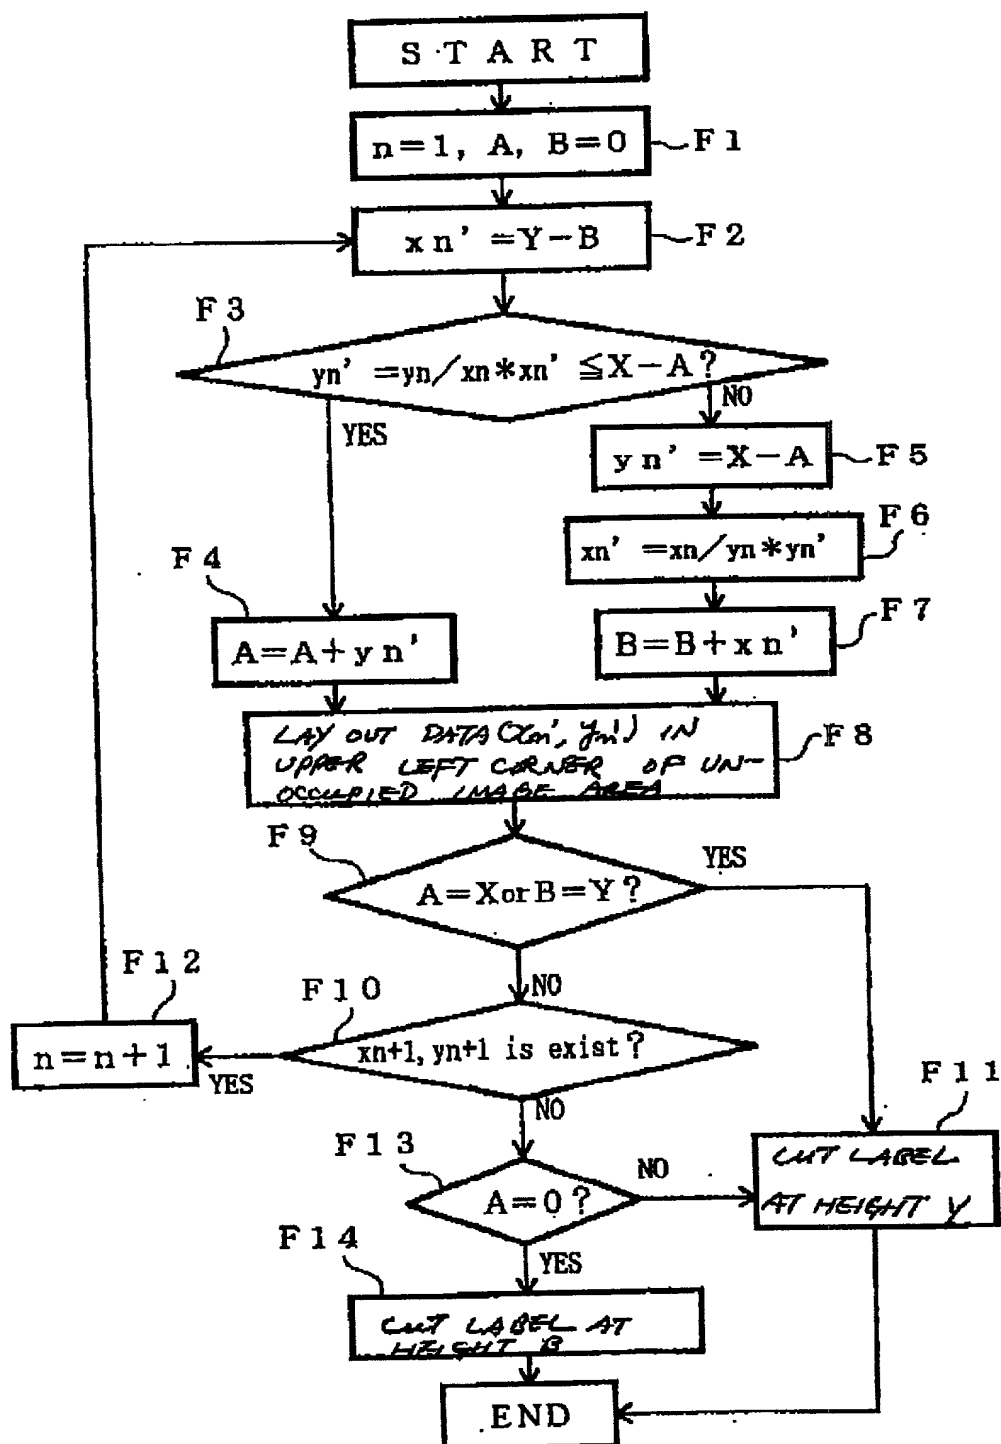


FIG. 17

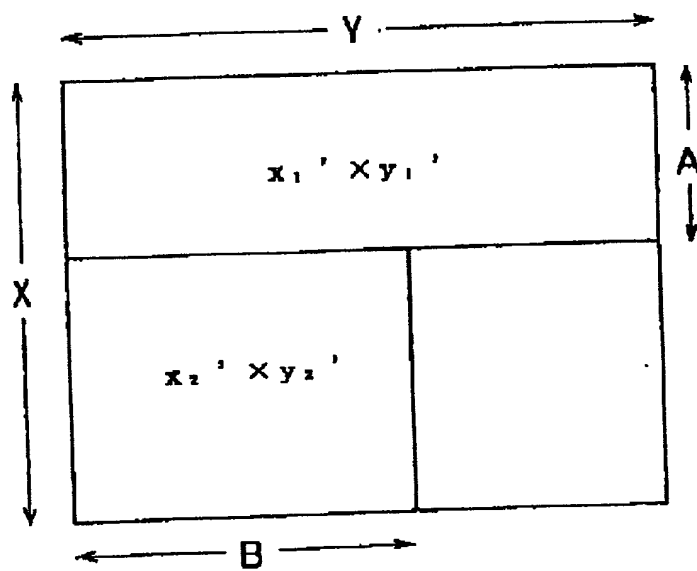


FIG. 18

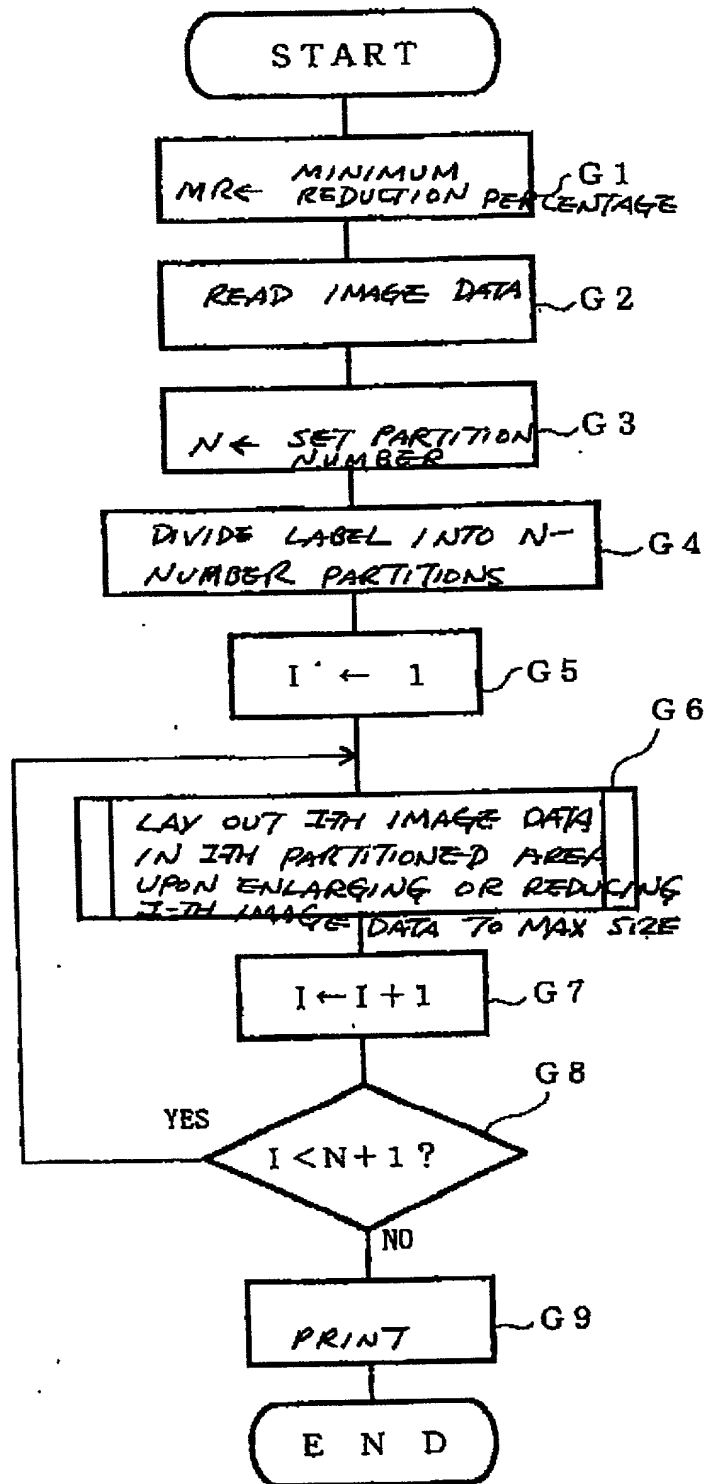


FIG. 19

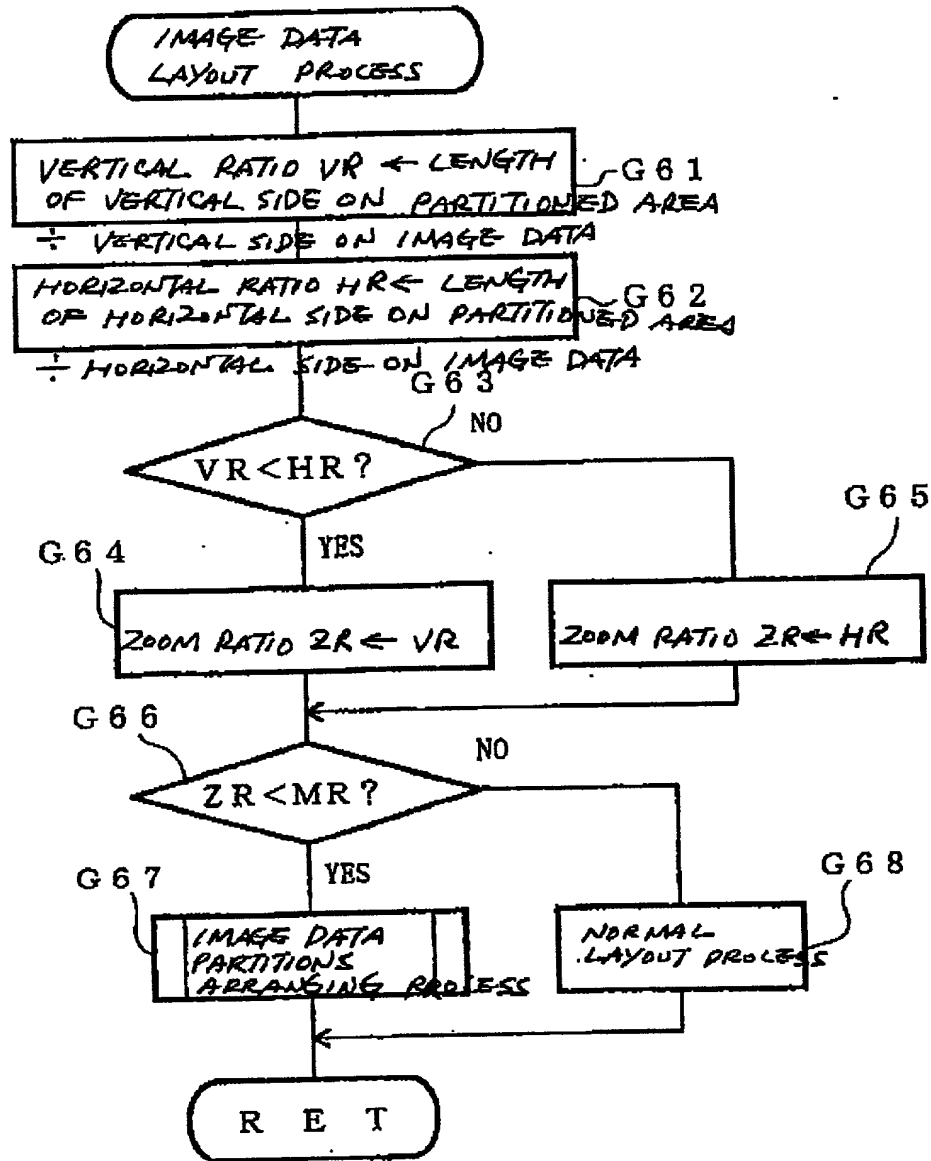


FIG. 20

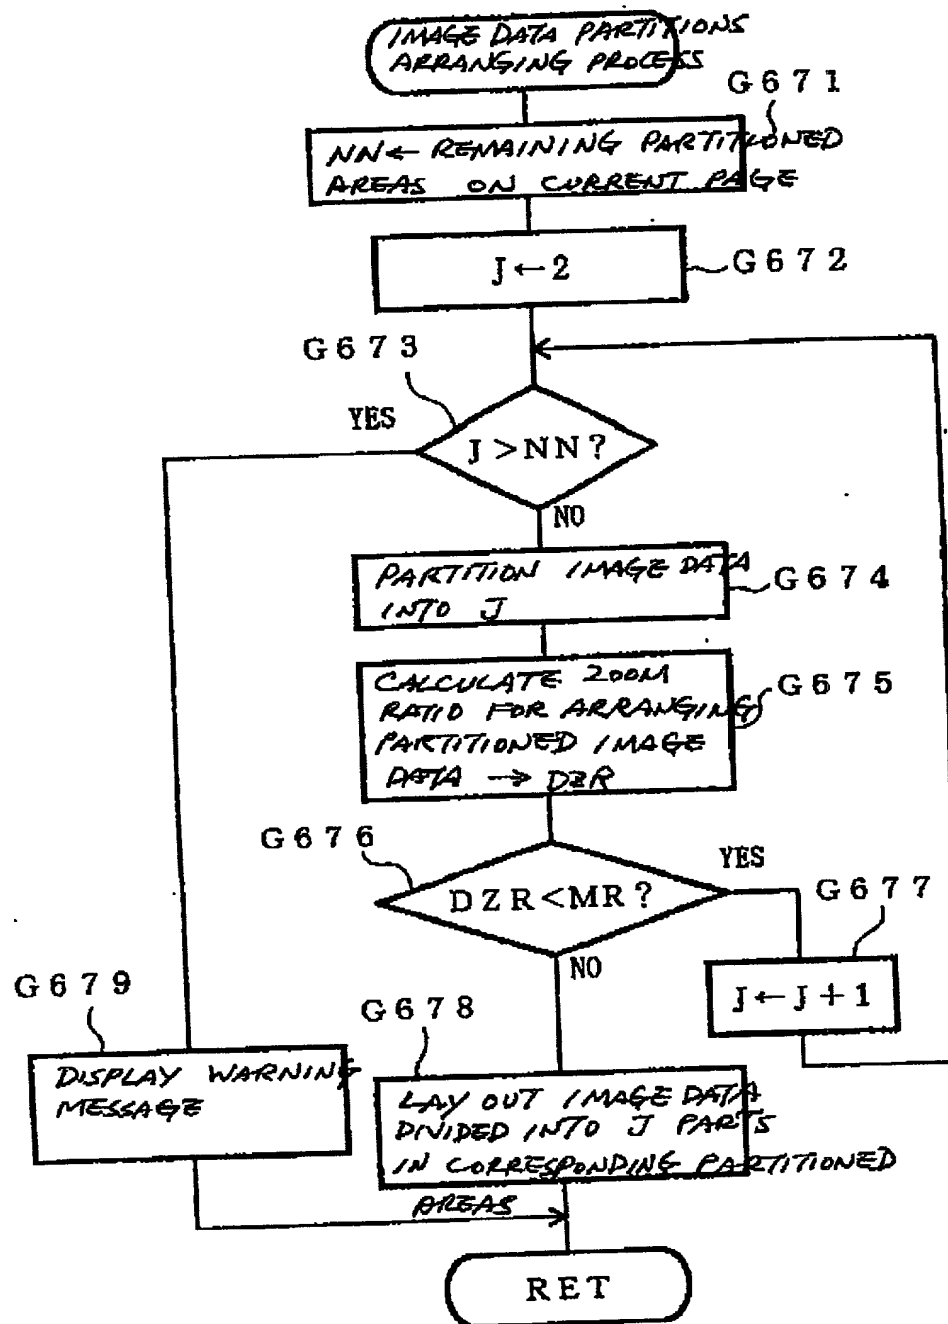


FIG. 22

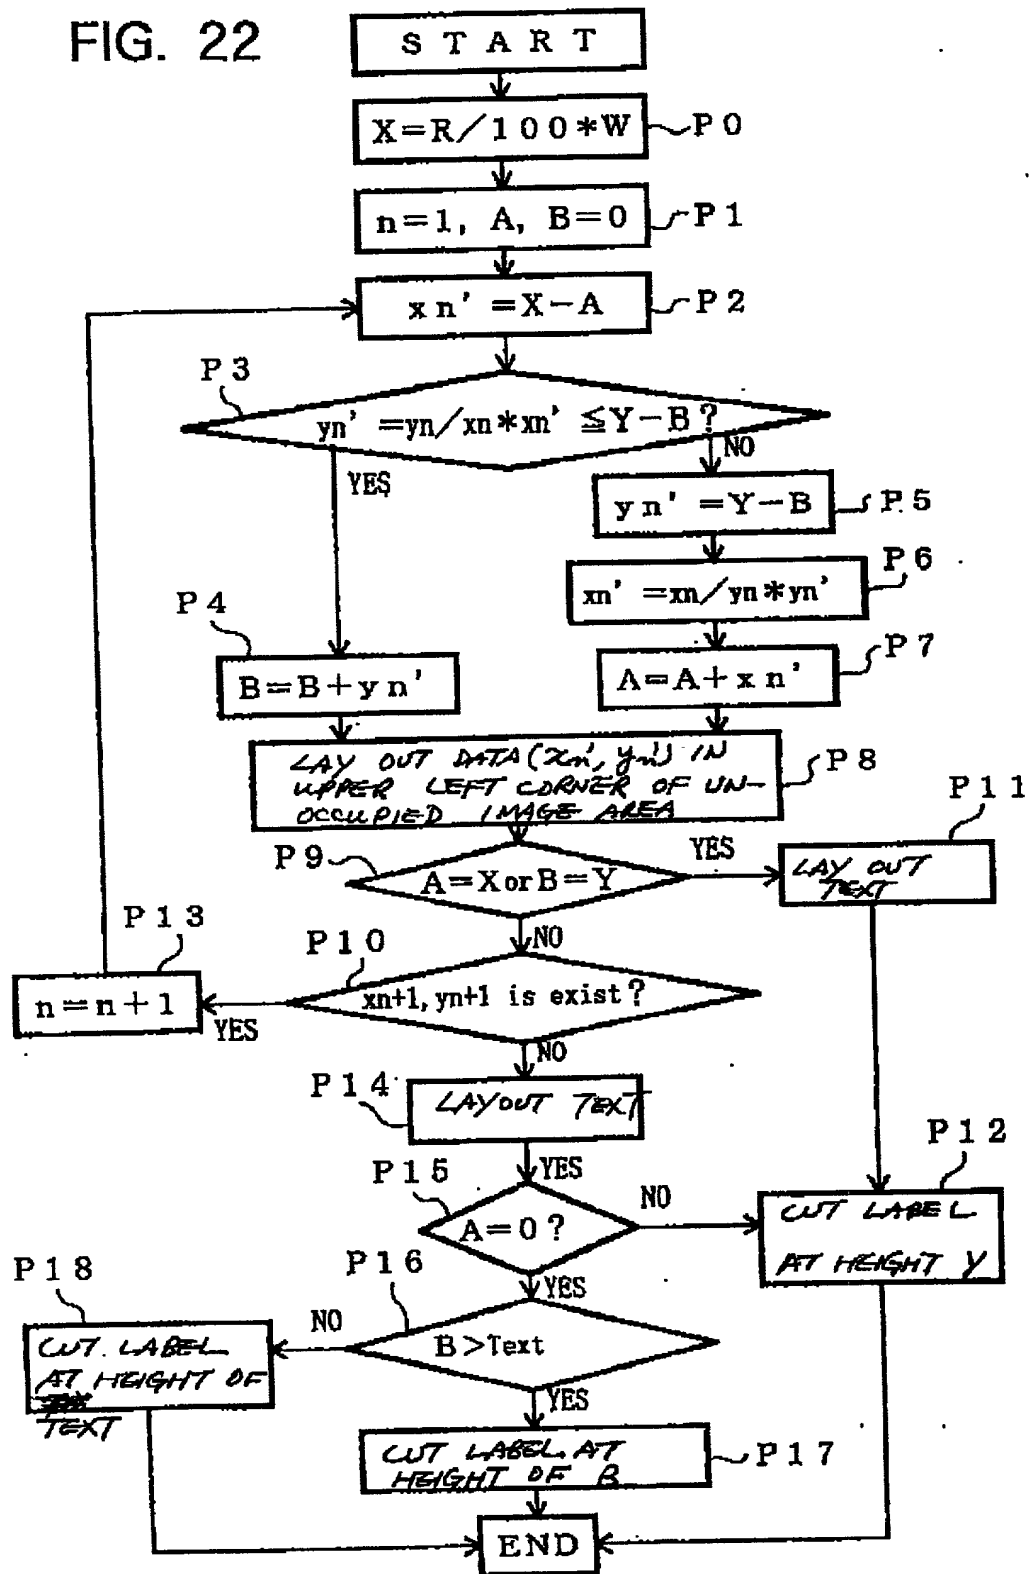


FIG. 23

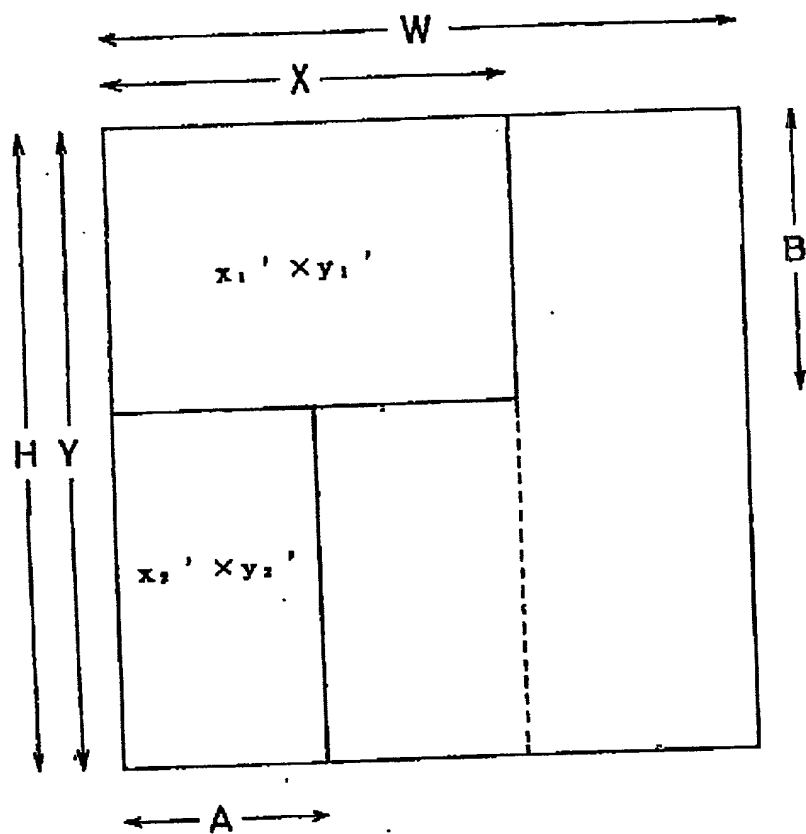


FIG. 24

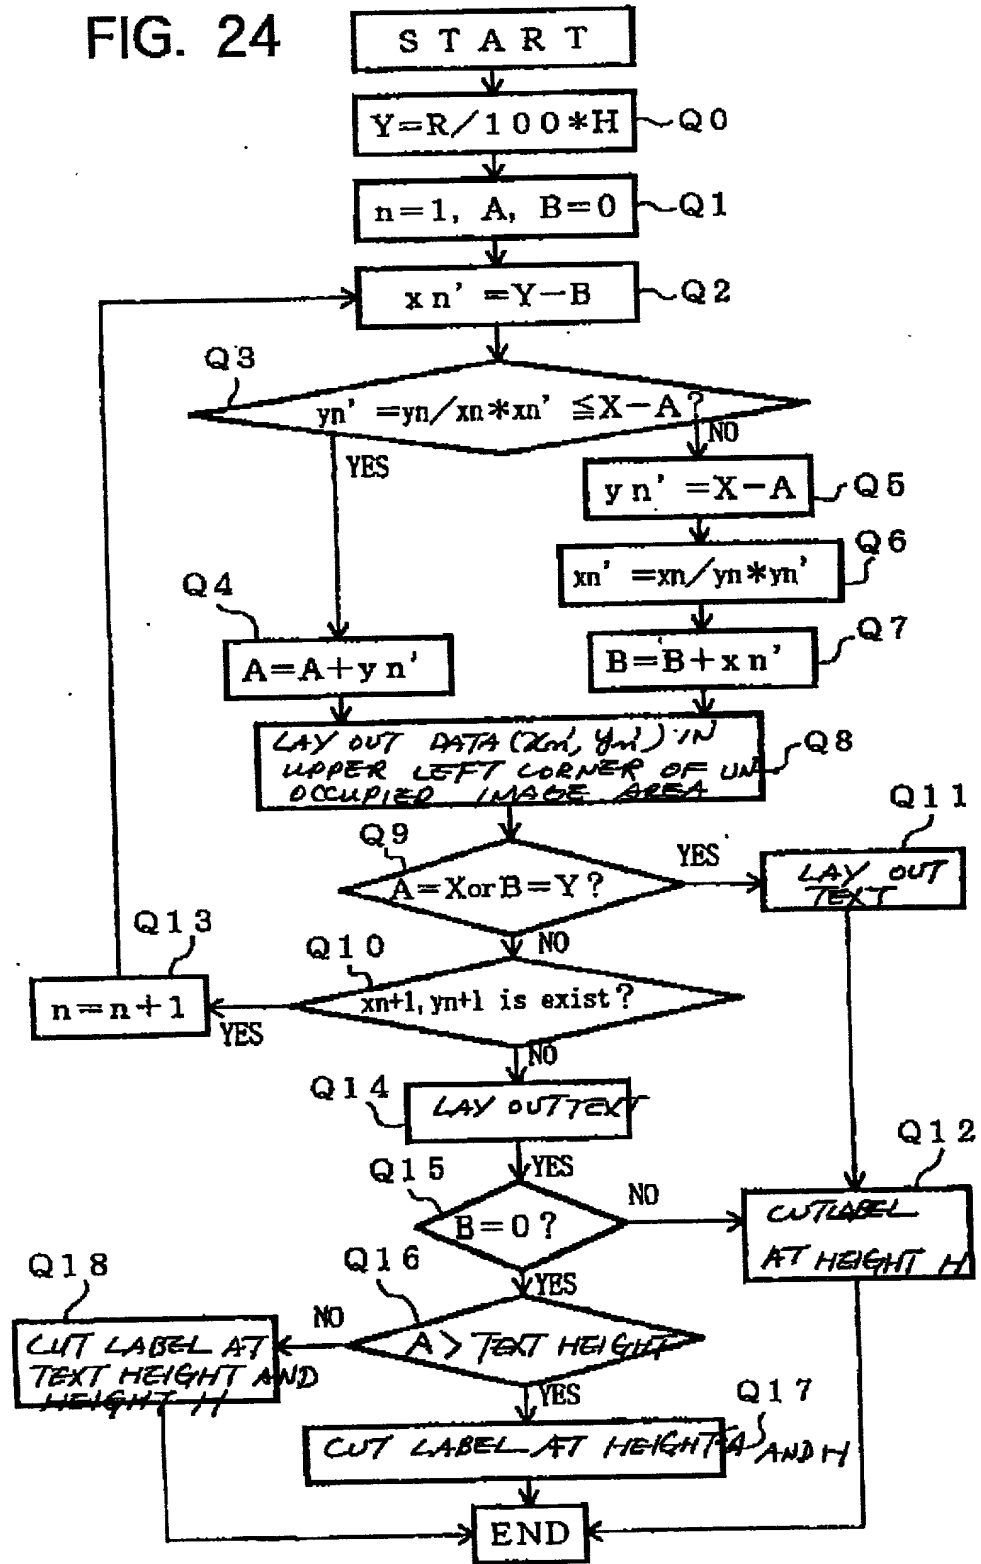


FIG. 25


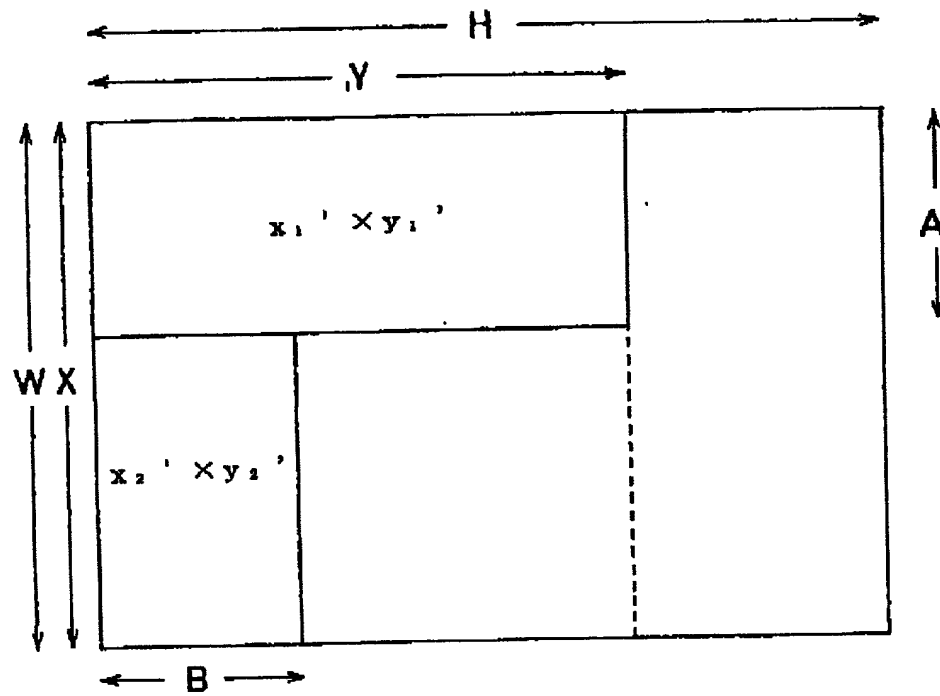


FIG. 26

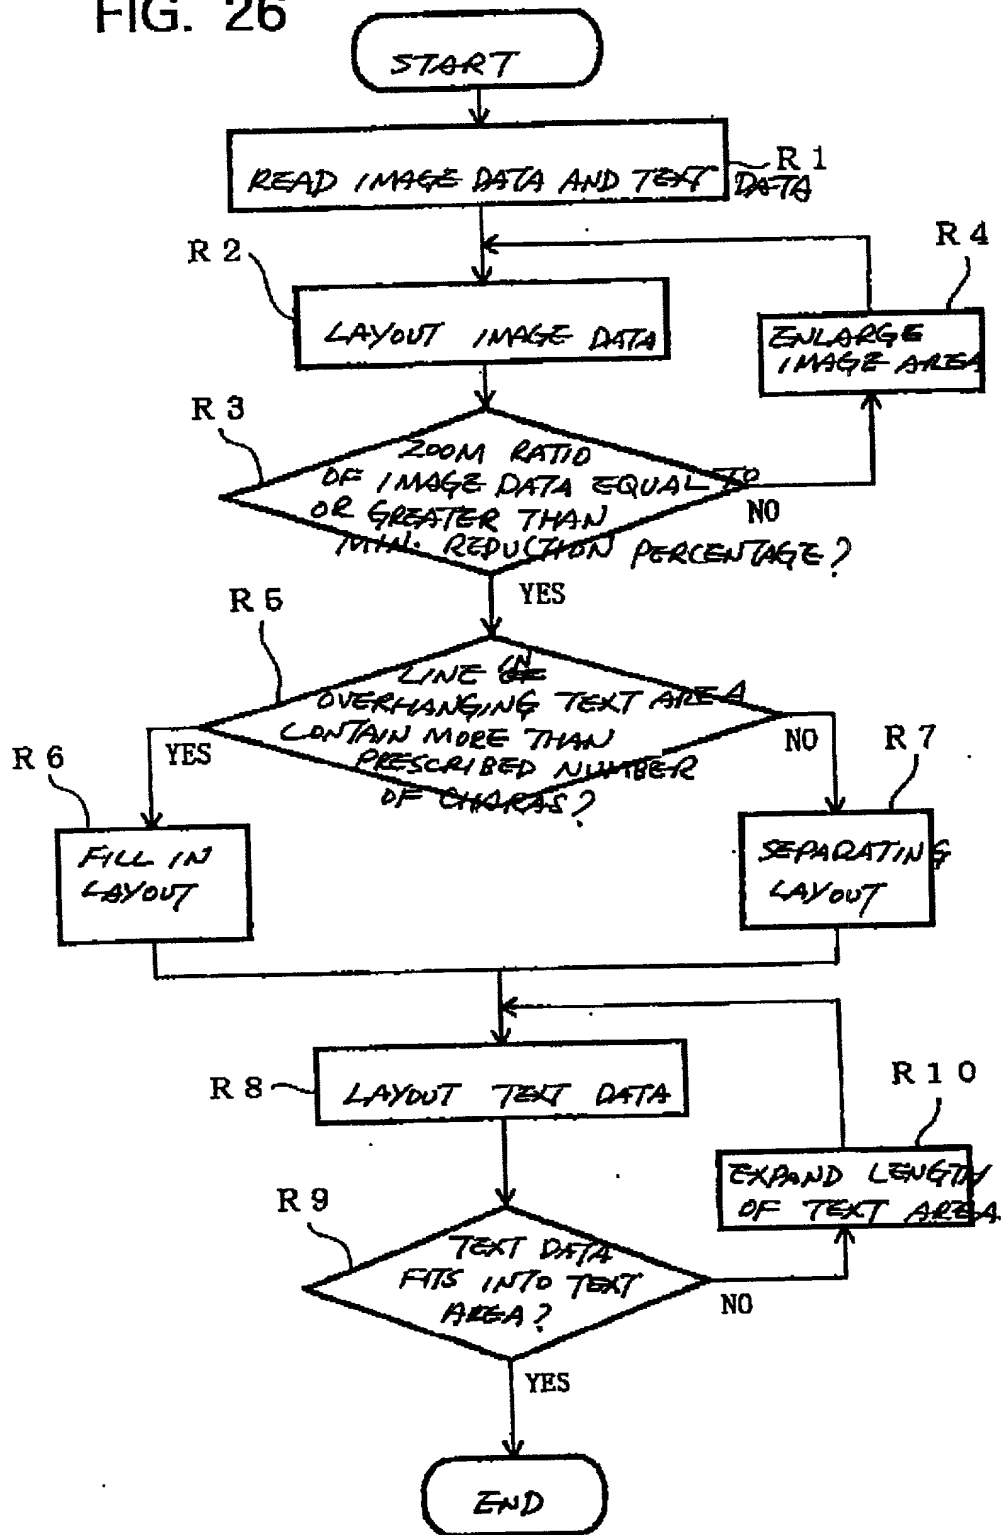

006260" E02/250

FIG. 27 (a)

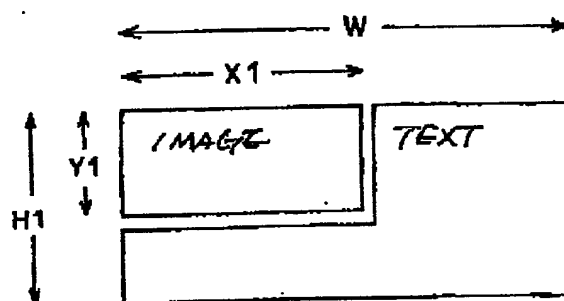


FIG. 27 (b)

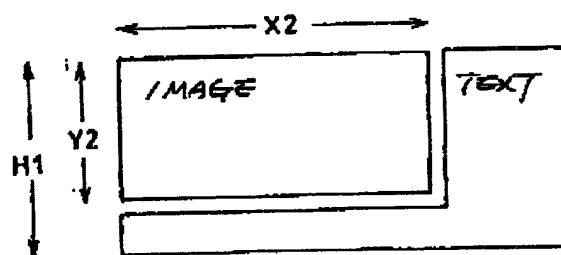


FIG. 27 (c)


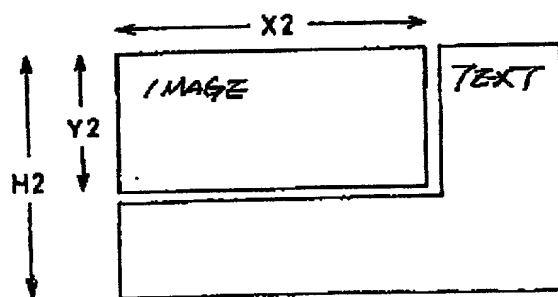


FIG. 27 (d)

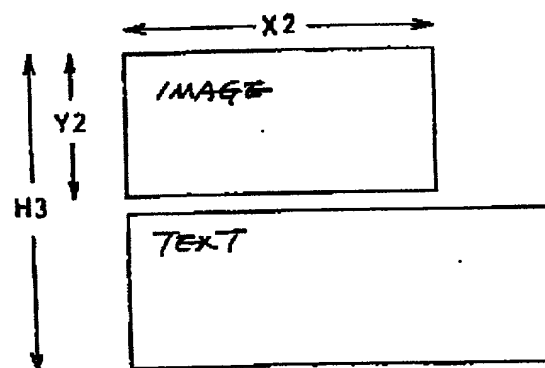

Declaration and Power of Attorney for Patent Application

特許出願宣言書兼委任状

Japanese Language Declaration

私は、下欄に氏名を記載した発明者として、以下のとおり宣言する：

私の住所、郵便の宛先および国籍は、下欄に氏名に続いて記載したとおりであり、下記名称の発明に関し、請求の範囲に記載した特許を求める主題の本来の、最初にして唯一の発明者である（一人の氏名のみが下欄に記載されている場合）か、もしくは本来の、最初にして共同の発明者である（複数の氏名が下欄に記載されている場合）と信じ、

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

DATA PROCESSING FOR ARRANGING TEXT AND IMAGE DATA ON A SUBSTRATE

その明細書を
(該当するものにチェック)

(X) ここに添付する。

() 年 月 日

出願番号第 として出願され、

年 月 日補正し、
(該当する場合)

私は、前記のとおり補正した請求の範囲を含む前記明細書の内容を検討し、理解したことを陳述する。

私は、連邦規則法典第37章第1条第56項に従い、本願の特許性の有無について重要な情報を開示すべき義務を有することを認める。

私は、合衆国法典第35章第119条に基づく下記の外国特許出願または発明者証出願の外国優先権利益を主張し、さらに優先権の主張に係わる基礎出願の出願日前の出願日を有する外国特許出願または発明者証出願および/または米国仮出願を以下に明記する：

the specification of which
(check one)

(X) is attached hereto.

() was filed on 年 月 日 as

Application Serial No. 番号

and was amended on 年 月 日
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and/or any U.S. provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

00673033-092900

Prior foreign and/or provisional applications 先行外国出願/仮出願			Priority claimed 優先権の主張	
Patent Appln. No. 11-279317 (Number/番号)	Japan (Country/国名)	30/September/1999 (Day/Month/Year Filed/出願年月日)	(X) (Yes/はい)	() (No/いいえ)
Patent Appln. No. 11-279318 (Number/番号)	Japan (Country/国名)	30/September/1999 (Day/Month/Year Filed/出願年月日)	(X) (Yes/はい)	() (No/いいえ)
Patent Appln. No. 11-279471 (Number/番号)	Japan (Country/国名)	30/September/1999 (Day/Month/Year Filed/出願年月日)	(X) (Yes/はい)	() (No/いいえ)
Patent Appln. No. 11-279472 (Number/番号)	Japan (Country/国名)	30/September/1999 (Day/Month/Year Filed/出願年月日)	(X) (Yes/はい)	() (No/いいえ)

私は、合衆国法典第35章第120条に基づく下記の合衆国特許出願の利益を主張し、本願の請求の範囲各項に記載の主題が合衆国法典第35章第112条第1項に規定の様態で先の合衆国出願に開示されていない限りにおいて、先の出願の出願日と本願の国内出願日またはPCT国際出願日の間に公表された連邦規則法典第37章第1条第56項に記載の所要の情報を開示すべき義務を有することを認める。

I hereby claim the benefit under Title 35, United States code, §120 of any United States application(s) listed below and, in so far as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112. I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No./出願番号)

(Filing Date/出願日)

(Status: Patented, Pending, abandoned/
状態: 特許成立、係属中、放棄済み)

(Application Serial No./出願番号)

(Filing Date/出願日)

(Status: Patented, Pending, abandoned/
状態: 特許成立、係属中、放棄済み)

私は、ここに自己の知識にもとづいて行った陳述がすべて真実であり、自己の有する情報および信ずるところに従って行った陳述が真実であると信じ、さらに故意に虚偽の陳述等を行った場合、合衆国法典第18章第1001条により、罰金もしくは禁錮に処せられるか、またはこれらの刑が併科され、またかかる故意による虚偽の陳述が本願ないし本願に対して付与される特許の有効性を損なうことがあることを認識して、以上の陳述を行ったことを宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that those statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

006260 "EE02/960

委任状：私は下記発明者として、以下の代理人をここに選任し、本願の手続を遂行すること並びにこれに関する一切の行為を特許商標庁に対して行うことを委任する。（代理人氏名および登録番号を明記のこと）

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

James A. Oliff, Reg. No. 27,075; William P. Berridge, Reg. No. 30,024;
Kirk M. Hudson, Reg. No. 27,562; Thomas J. Pardini, Reg. No. 30,411;
Edward P. Walker, Reg. No. 31,450; Robert A. Miller, Reg. No. 32,771 and
Mario A. Costantino, Reg. No. 33,565

Send Correspondence To/特許送付先:

OLIFF & BERRIDGE
P. O. BOX 19928
ALEXANDRIA, VIRGINIA 22320
USA
Telephone: (703) 836-6400

Direct Telephone Calls To (name and telephone number)/特許電話連絡先(氏名および電話番号):

Full name of sole or first inventor/単独または第一発明者の氏名 Chitoshi ITO	
Inventor's signature/発明者の署名 Chitoshi Ito	Date/日付 Sep. 28. 2000
Residence/住所 Kasugai-shi, Aichi-ken, Japan	
Citizenship/国籍 Japanese	
Post Office Address/郵便先 c/o BROTHIER KOGYO KABUSHIKI KAISHA 15-1 Naeshiro-cho, Mizuho-ku, Nagoya-shi, Aichi-ken, 467-8561 Japan	
Full name of second joint inventor (if any)/第二発明者の氏名(該当する場合) Kazuhiko IWANAGA	
Second inventor's signature/第二発明者の署名 Kazuhiko Iwanaga	Date/日付 Sep 28. 2000
Residence/住所 Nagoya-shi, Aichi-ken, Japan	
Citizenship/国籍 Japanese	
Post Office Address/郵便先 c/o BROTHER KOGYO KABUSHIKI KAISHA 15-1 Naeshiro-cho, Mizuho-ku, Nagoya-shi, Aichi-ken, 467-8561 Japan	

Supply similar information and signature for third and subsequent joint inventors.
注：又はそれ以降の共同発明者に対して同様な情報および署名を提出すること。

005260" 2202/960

Full name of third joint inventor (if any)/第三共同発明者の氏名(該当する場合) Hirokazu KUWABARA	
Third inventor's signature/第三発明者の署名 Hirokazu Kuwabara	Date/日付 Sep. 28, 2000
Residence/住所 Nagoya-shi, Aichi-ken, Japan	
Citizenship/国籍 Japanese	
Post Office Address/郵便先 c/o BROTHER KOGYO KABUSHIKI KAISHA 15-1 Naeshiro-cho, Mizuho-ku, Nagoya-shi, Aichi-ken, 467-8561 Japan	
Full name of fourth joint inventor (if any)/第四共同発明者の氏名(該当する場合) Tatsuhiko IKEDO	
Fourth inventor's signature/第四発明者の署名 Tatsuhiko Ikedo	Date/日付 Sep. 28, 2000
Residence/住所 Nagoya-shi, Aichi-ken, Japan	
Citizenship/国籍 Japanese	
Post Office Address/郵便先 c/o BROTHER KOGYO KABUSHIKI KAISHA 15-1 Naeshiro-cho, Mizuho-ku, Nagoya-shi, Aichi-ken, 467-8561 Japan	
Full name of fifth joint inventor (if any)/第五共同発明者の氏名(該当する場合)	
Fifth inventor's signature/第五発明者の署名	Date/日付
Residence/住所	
Citizenship/国籍	
Post Office Address/郵便先	
Full name of sixth joint inventor (if any)/第六共同発明者の氏名(該当する場合)	
Sixth inventor's signature/第六発明者の署名	Date/日付
Residence/住所	
Citizenship/国籍	
Post Office Address/郵便先	

Supply similar information and signature for seventh and subsequent joint inventors.
 第七に又はそれ以降の共同発明者に対して同様の情報および署名を提供すること。